

WAAS

CH 86614

W34A

APP CRS

345°

Rwy Idg

4798

TDZE

3081

Apt Elev

3086

RNAV (GPS) RWY 34

RONAN (7S0)

RNP APCH.


NA

Baro-VNAV NA when using Missoula altimeter setting. For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C. Circling NA east of Rwy 16-34. When local altimeter setting not received, use Missoula altimeter setting and increase LPV DA to 3545 and all visibilities ¾ SM, LNAV/VNAV DA to 3545 and all visibilities ¾ SM; and increase all MDAs 120 feet.

MISSED APPROACH:

Climb to 13000 direct PEKBE and on track 255° to QATQI and on track 209° to HANIM and hold, continue climb-in-hold to 13000.

AWOS-2 119.925	SALT LAKE CITY CENTER 127.075 244.875	AUNICOM 122.8 (CTAF) 0
-------------------	--	---------------------------

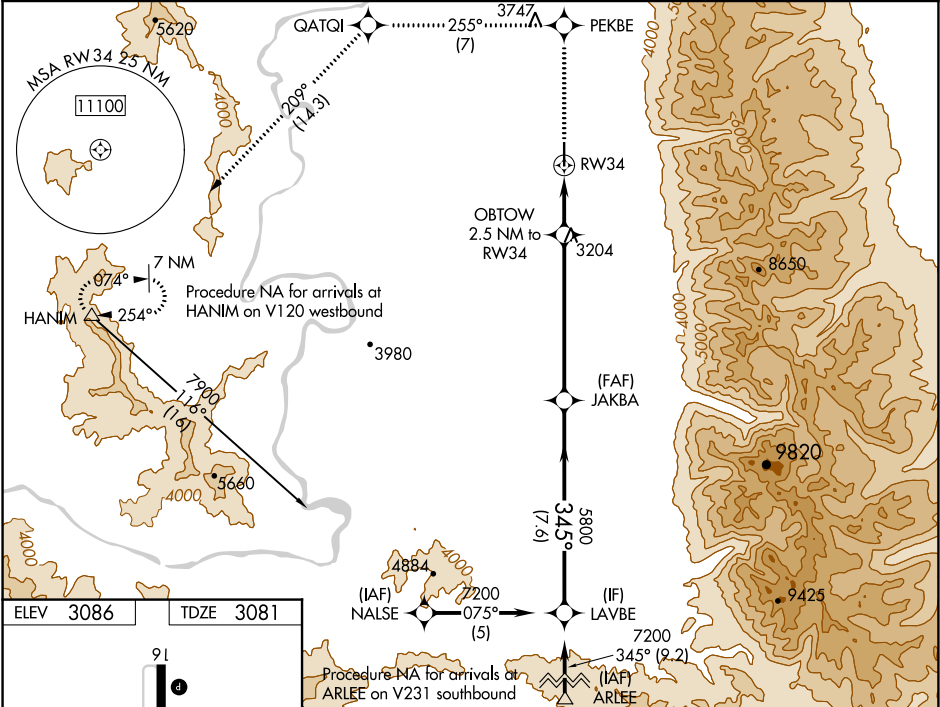

ELEV 3086	TDZE 3081
91 4798 X 7.5 34 345°	
13000 PEKBE tr 255° QATQI tr 209° HANIM VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22). LAVBE JAKBA 5800 345° 7200 3900* 2.5 NM 5.9 NM 7.6 NM GP 3.00° TCH 40	
*LNAV only OBTOW 2.5 NM to RW34 RW34	
CATEGORY	A B C D
LPV DA	3438-1 357 (400-1) NA
LNAV/VNAV DA	3438-1¼ 357 (400-1¼) NA
LNAV MDA	3520-1 439 (500-1) NA
CIRCLING	3560-1 474 (500-1) NA