

WAAS CH 70417 W17A	APP CRS 173°	Rwy Idg TDZE Apt Elev	6824 2589 2589
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17


AINSWORTH RGNL (ANW)

RNP APCH.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, and LNAV Cats C/D visibility to ¾ SM.

MALSR


MISSED APPROACH: Climb to 5100 direct FUGLE and hold.

AWOS-3 118.325	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF) 
--------------------------	--------------------------------------	---

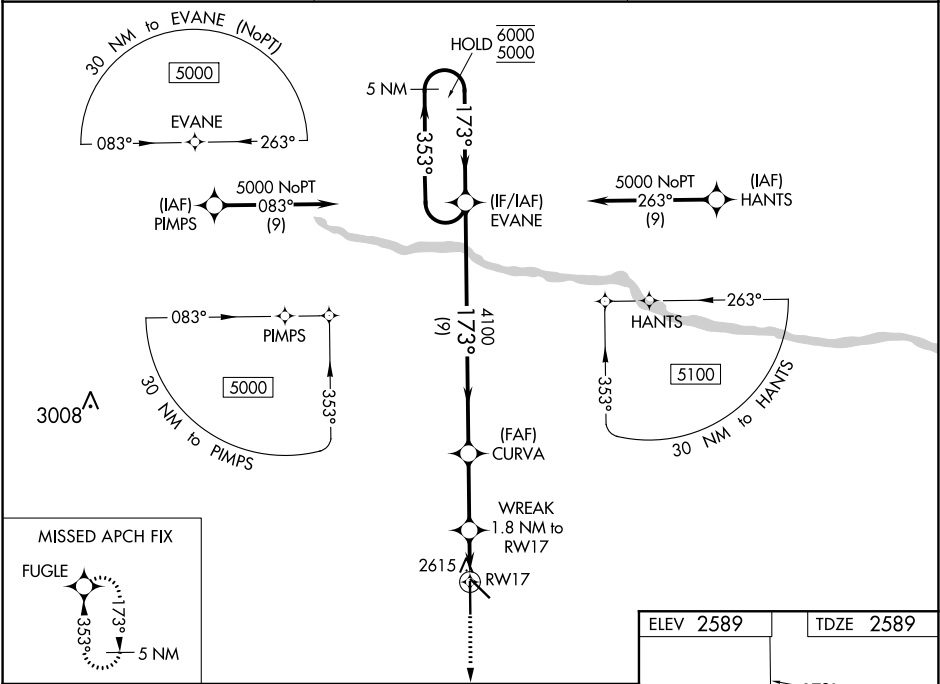

5 NM Holding Pattern		EVANE		CURVA		WREAK 1.8 NM to RW17		5100	FUGLE
6000		353°		173°		173°		*LNAV only	
5000		173°		173°		173°		*0.7 NM to RW17	
GP 3.00°		4100		4100		*3220		RW17	
TCH 46		9 NM		2.8 NM		1.1 NM		0.7 NM	
CATEGORY		A		B		C		D	
LPV	DA	2789-½		200 (200-½)					
LNAV/VNAV	DA	2839-½		250 (300-½)					
LNAV	MDA	2880-½		291 (300-½)					
CIRCLING		3000-1 411 (500-1)		3040-1 451 (500-1)		3040-1½ 451 (500-1½)		3200-2 611 (700-2)	

