


| | | | |
|--|------------------------|---|-------------|
| WAAS CH 56613 W01A | APP CRS 006° | Rwy Idg TDZE 17 Apt Elev 36 | 5930 |
|--|------------------------|---|-------------|

RNAV (GPS) Y RWY 1L


NAPA COUNTY (APC)

| | | |
|--|------|--|
| RNP APCH. | MALS | MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold, continue climb-in-hold to 5000. |
| <p>▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Circling Cats A/B/C NA northeast or Rwy's 19R and 24. Circling Cat D NA east of Rwy 19L-1R. Inop table does not apply to LPV, LNAV/VNAV all Cats, and LNAV Cats C/D. Circling Rwy 6 NA at night.</p> | | |

| | | | | | |
|-----------------------|--------------------------------------|---|-------------------------|---------------------------|-------------------------|
| ATIS 124.05 | OAKLAND CENTER 127.8 353.5 | NAPA TOWER ★ 118.7 (CTAF) 0 257.8 | GND CON 121.7 | CLNC DEL 127.85 | UNICOM 122.95 |
|-----------------------|--------------------------------------|---|-------------------------|---------------------------|-------------------------|

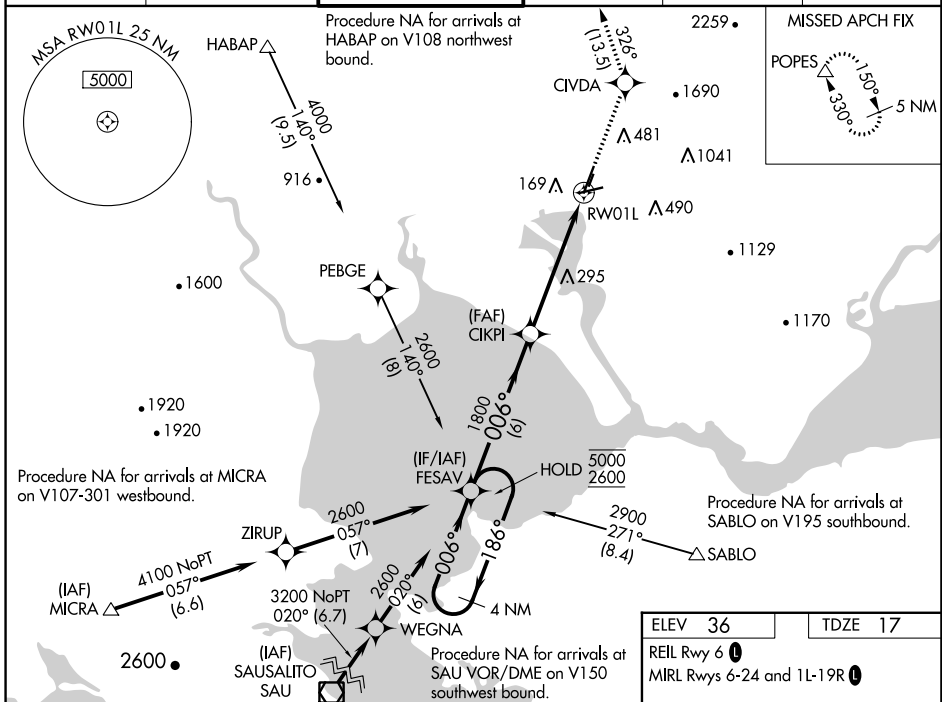

| | | | | |
|--|--|---------------------------|-------------------------|-------------------------|
| <p>4 NM Holding Pattern</p> <p>5000 ← 186°</p> <p>2600 → 006°</p> <p>GP 3.00° TCH 50</p> | <p>FESAV</p> <p>5000 CIVDA tr POPES</p> <p>1800 *3.7 NM to RWY 1L *RNAV only</p> <p>1800</p> <p>1800</p> <p>1800</p> | | | |
| | 6 NM | 1.8 NM | 3.7 NM | |
| CATEGORY | A | B | C | D |
| LPV DA | | 1252-5 | 1235 (1300-5) | |
| LNAV/VNAV DA | | 1051-4 | 1034 (1100-4) | |
| LNAV MDA | 1260-1 1243 (1300-1) | 1260-1¼ 1243 (1300-1¼) | 1260-3 1243 (1300-3) | |
| CIRCLING | 1260-1¼ 1224 (1300-1¼) | 1260-1½ 1224 (1300-1½) | 1280-3 1244 (1300-3) | 1300-3 1264 (1300-3) |

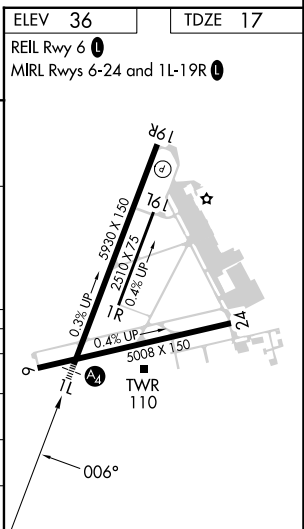

SW-2, 22 FEB 2024 to 21 MAR 2024

SW-2, 22 FEB 2024 to 21 MAR 2024