

LOC I-0XK 109.9	APP CRS 139°	Rwy Idg 8006 TDZE 459 Apt Elev 459
---------------------------	------------------------	---

ILS or LOC RWY 14R
SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

T For inop ALS, increase S-ILS 14R Cat E visibility to RVR 4000 and S-LOC 14R Cat E visibility to 1 3/4 mile. DME from SKE TACAN. DME use requires simultaneous reception of I-OKX and SKE DME.


A *RVR 1800 authorized with use of FD or AP or HUD to DA.

ASR

ALSF-1

MISSED APPROACH: Climb to 2200 then on TOY VORTAC R-148 to WOMUG INT/TOY 25.6 DME and hold.

ATIS ★	ST LOUIS APP CON	SCOTT TOWER	GND CON	CLNC DEL
128.7 256.7	125.2 281.5	128.25 253.5	119.2 275.8	119.875 263.025

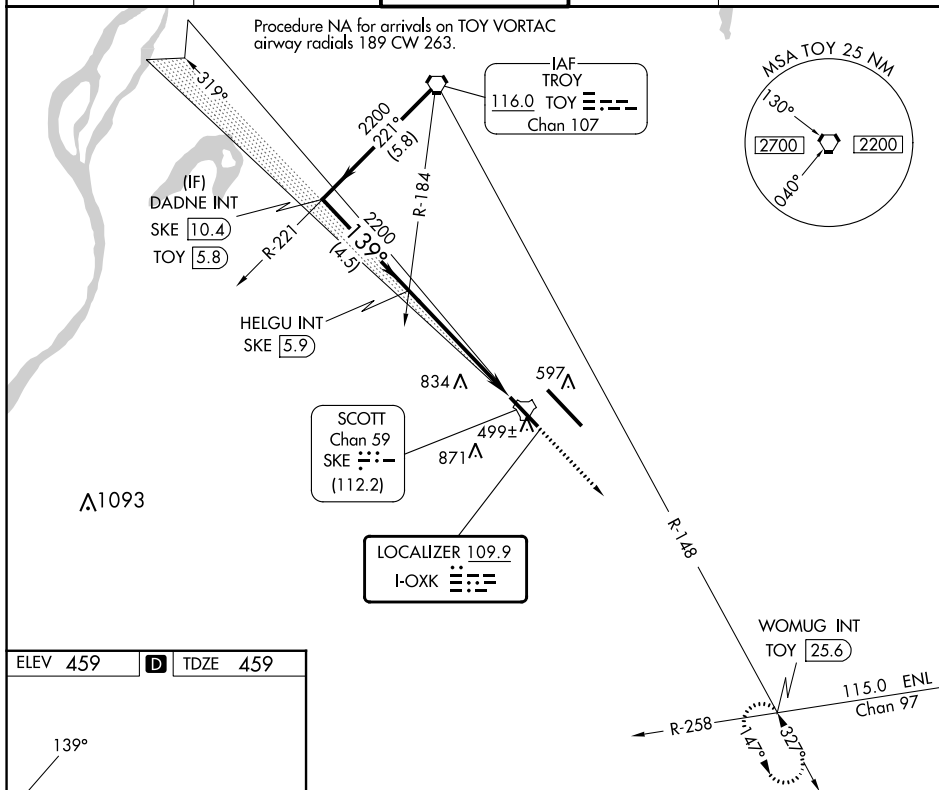

HIRL Rwys 14L-32R and 14R-32L
REIL Rwy 14L

FAF to MAP 5.3 NM					
Knots	60	90	120	150	180
Min:Sec	5:18	3:32	2:39	2:07	1:46

DADNE INT SKE 10.4		HELGU INT SKE 5.9		2200 ↑	TOY R-148	WOMUG INT
2200 139° 2200 GS 3.00° TCH 51 4.5 NM 5.3 NM SKE 0.6						
CATEGORY	A	B	C	D	E	
S-ILS 14R *	659/24 200 (200-½)					
S-LOC 14R	1040/24 581 (600-½)		1040-1¼ 581 (600-1¼)			
CIRCLING	1040-1 581 (600-1)	1120-1 661 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)	1240-2¾ 781 (800-2¾)	