


AL-78 (FAA)

CHARLOTTE/DOUGLAS INTL (CLT)  
CHARLOTTE, NORTH CAROLINA

## WEAZL FOUR DEPARTURE (RNAV)

**TOP ALTITUDE:**  
8000

D-ATIS DEP 132.1  
CLNC DEL  
127.15 348.6  
CPDLC  
GND CON  
21.8 348.6 (WEST)  
21.9 348.6 (EAST)  
CHARLOTTE TOWER  
27.8 (Rwys 18L-36R)  
27.8 (Rwy 18C-36C)  
257.8 (Rwy 18R-36L)  
CHARLOTTE DEP CON  
120.5 257.2

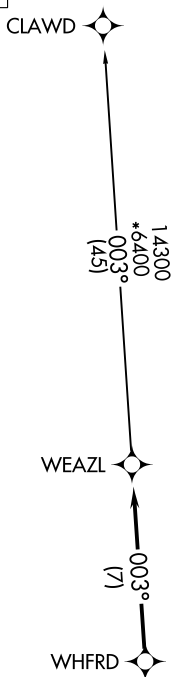

NOTE: For turbojets only.


NOTE: DME/DME/IRU or GPS required.

NOTE: RNAV 1.

NOTE: RADAR required.

NOTE: If unable to accept climb rates, advise ATC on initial contact.

NOTE: Accelerate to 250K, if unable advise ATC. Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.

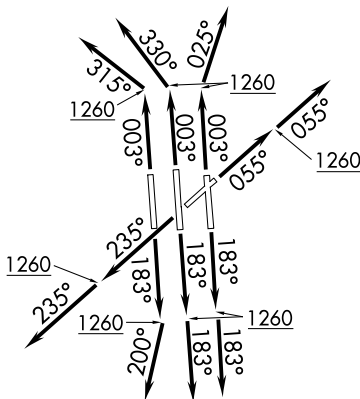

## TAKEOFF MINIMUMS

Rwys 18C/L/R, 23, 36C/R: Standard with minimum climb of 500' per NM to 1260.  
Rwy 5: Standard with minimum climb of 500' per NM to 1300.  
Rwy 36L: Standard with minimum climb of 500' per NM to 1400.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

WEAZL FOUR DEPARTURE (RNAV)

CHARLOTTE, NORTH CAROLINA  
CHARLOTTE/DOUGLAS INTL (CLT)

(WEAZL4.WEAZL) 03JAN19

SE-2, 22 FEB 2024 to 21 MAR 2024

SE-2, 22 FEB 2024 to 21 MAR 2024



DEPARTURE ROUTE DESCRIPTION  
SEE ADDITIONAL REQUIREMENTS ON AAUP

TAKEOFF RWY 5: Climb heading 055° to 1260, then on heading 055° or as assigned by ATC, expect RADAR vectors to WHFRD, thence. . .

TAKEOFF RWYS 18C/L: Climb heading 183° to 1260, then on heading 183° or as assigned by ATC, expect RADAR vectors to WHFRD, thence. . .

TAKEOFF RWY 18R: Climb heading 183° to 1260, then on heading 200° or as assigned by ATC, expect RADAR vectors to WHFRD, thence. . .

TAKEOFF RWY 23: Climb heading 235° to 1260, then on heading 235° or as assigned by ATC, expect RADAR vectors to WHFRD, thence. . .

TAKEOFF RWY 36C: Climb heading 003° to 1260, then on heading 330° or as assigned by ATC, expect RADAR vectors to WHFRD, thence. . .

TAKEOFF RWY 36L: Climb heading 003° to 1260, then on heading 315° or as assigned by ATC, expect RADAR vectors to WHFRD, thence. . .

TAKEOFF RWY 36R: Climb heading 003° to 1260, then on heading 025° or as assigned by ATC, expect RADAR vectors to WHFRD, thence. . .

. . .on track 003° to WEAZL, then on CLAWD TRANSITION. Maintain 8000.  
Expect clearance to filed altitude within 10 minutes after departure.

CLAWD TRANSITION (WEAZL4.CLAWD)