

LOC/DME I-CRQ 108.7 Chan 24	APP CRS 245°	Rwy Idg 4897 TDZE 326 Apt Elev 331
---	------------------------	---


ILS or LOC RWY 24
MC CLELLAN-PALOMAR (CRQ)

⚠ Inop table does not apply to S-ILS Rwy 24.
⚠ Autopilot coupled approach NA below 960. DME required.
Rwy 24 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase S-LOC 24 Cat A/B visibility to RVR 5500 and Cat C visibility to 1 7/8 SM.

MAISR

MISSED APPROACH: Climb to 3000 on heading 245° and on OCN VORTAC R-145 to OCN VORTAC and hold.

ATIS 120.15	SOCAL APP CON 127.3 323.0	PALOMAR TOWER ★ 118.6 (CTAF) 0 276.4	GND CON 121.8	CLNC DEL 134.85
-----------------------	-------------------------------------	---	-------------------------	---------------------------

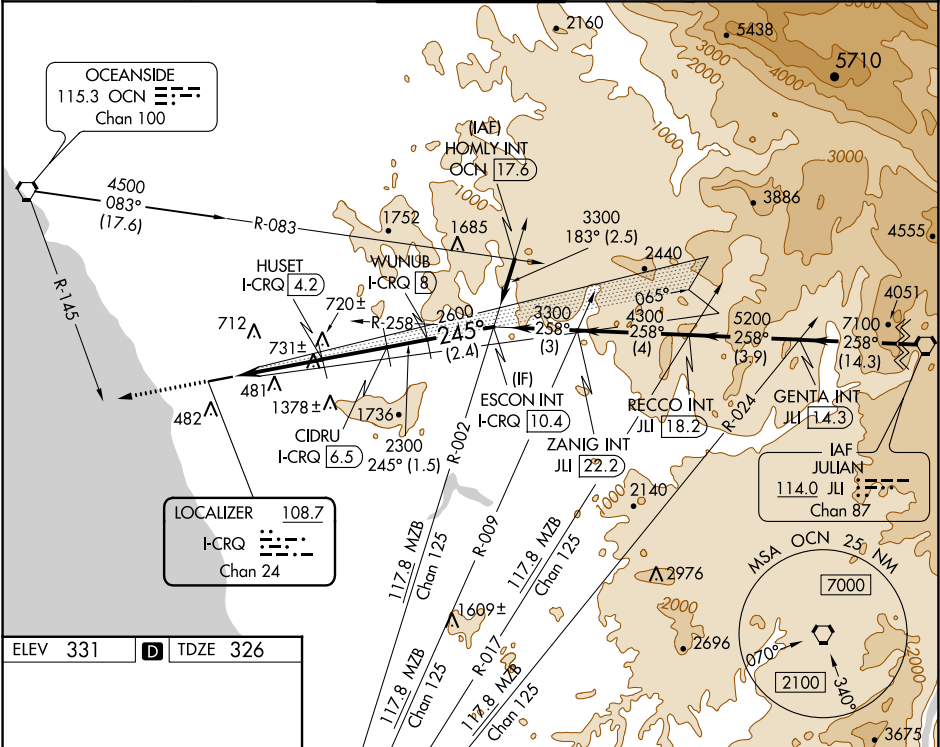

ELEV 331 **D** TDZE 326

REIL Rwy 24 **0**
HIRL Rwy 6-24 **0**

4897 X 150
TWR
245° 5.7 NM from FAF

	3000 hdg 245° OCN R-145	OCN 	CIDRU I-CRQ [6.5]	WUNUB I-CRQ [8]	ESCON INT I-CRQ [10.4]
	HUSET I-CRQ [4.2]	2300	245°	3300	
	*LOC only I-CRQ [0.9]	*I-CRQ [2.7]	1640*	2300	GS 3.20° TCH 55
	1.8 NM	1.5 NM	2.4 NM	1.5 NM	2.4 NM
CATEGORY	A	B	C	D	
S-ILS 24	527/40	201 (200-¾)	576/40 250 (300-¾)	NA	
S-LOC 24	1000/40	674 (700-¾)	1000-1½ 674 (700-1½)	NA	
C CIRCLING	1000-1 669 (700-1)	1020-1 689 (700-1)	1260-2¾ 929 (1000-2¾)	NA	

SW-3, 22 FEB 2024 to 21 MAR 2024

SW-3, 22 FEB 2024 to 21 MAR 2024