
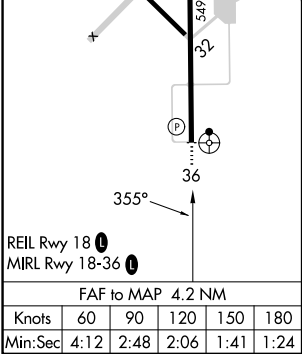


|                           |                        |                                                   |
|---------------------------|------------------------|---------------------------------------------------|
| LOC I-DRI<br><b>111.1</b> | APP CRS<br><b>355°</b> | Rwy Idg<br>TDZE <b>197</b><br>Apt Elev <b>202</b> |
|---------------------------|------------------------|---------------------------------------------------|

LOC RWY 36  
BEAUREGARD RGNL (DRI)

|                                                                                                                                                                                                                                                                                                 |                              |                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|----------------------------------------------------------------------------------------------------|
| <div>NA</div> <div>Inoperative table does not apply. ADF required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDAs 60 feet and S-36 visibility Cat C ½ SM and Circling Cats C/D visibility ¼ SM.</div> | <div>ODALS</div> <div></div> | <div>MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.</div> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|----------------------------------------------------------------------------------------------------|

|                            |                                    |                               |
|----------------------------|------------------------------------|-------------------------------|
| AWOS-3PT<br><b>118.225</b> | POLK APP CON<br><b>123.7 261.3</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|----------------------------|------------------------------------|-------------------------------|

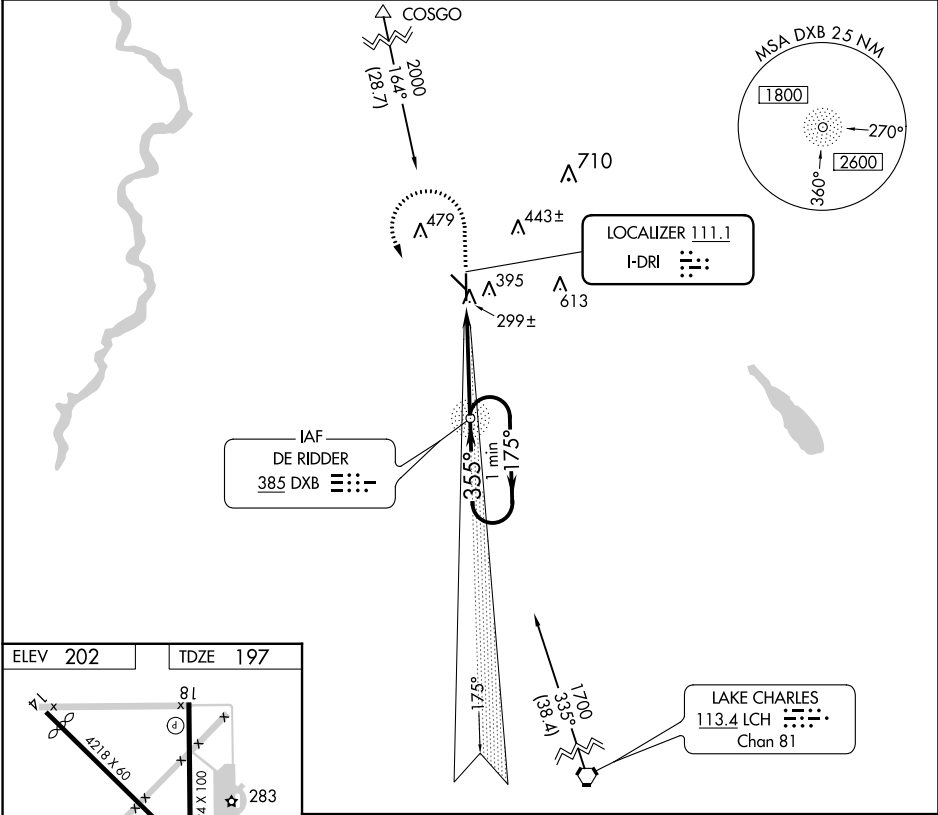

|                                                                  |                   |     |                     |                            |
|------------------------------------------------------------------|-------------------|-----|---------------------|----------------------------|
| 1000                                                             | 1700              | DXB | DXB NDB             | One Minute Holding Pattern |
|                                                                  |                   |     |                     |                            |
| VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 50). |                   |     |                     |                            |
| CATEGORY                                                         | A                 | B   | C                   | D                          |
| S-36                                                             | 560-1 363 (400-1) |     |                     | 560-1¼ 363 (400-1¼)        |
| CIRCLING                                                         | 720-1 518 (600-1) |     | 780-1½ 578 (600-1½) | 1000-2½ 798 (800-2½)       |