

WAAS CH 40302 W35A	APP CRS 355°	Rwy Idg TDZE Apt Elev 70	4488 70 70
--	------------------------	--	---------------------------------------

RNAV (GPS) Z RWY 35



SUMMIT (EVY)


RNP APCH - GPS.

Rwy 35 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct EPKAW and hold.

AWOS-3 132.325	PHILADELPHIA APP CON 118.35 323.1	UNICOM 122.725 (CTAF)	123.5
--------------------------	---	---------------------------------	--------------

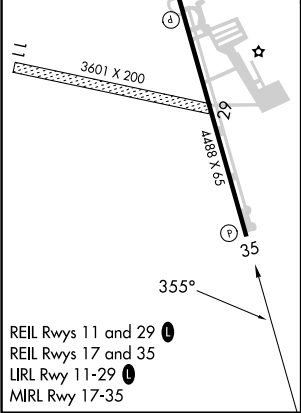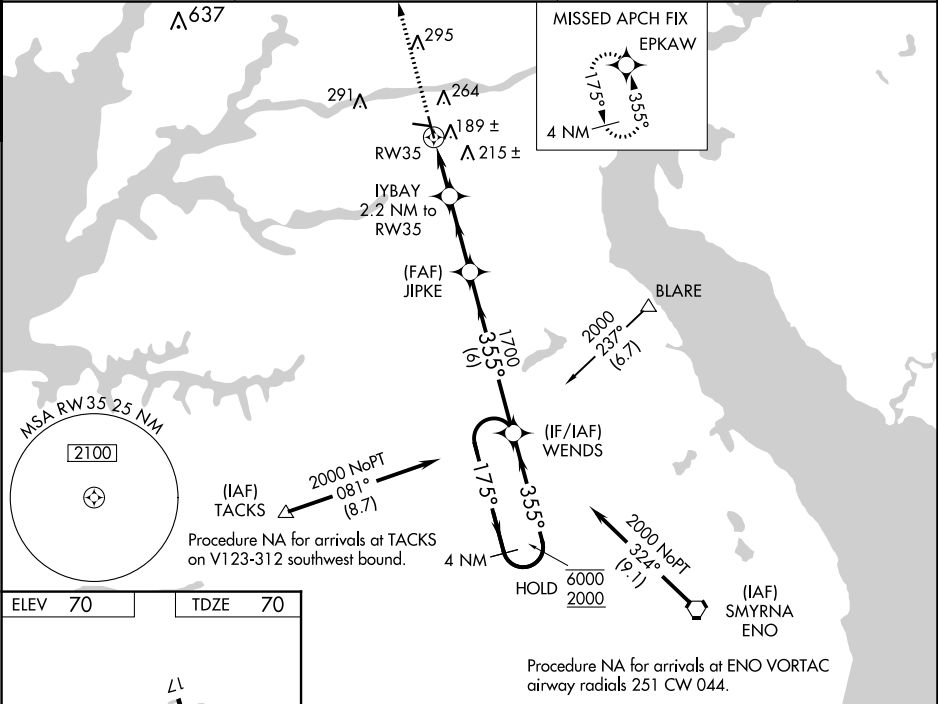

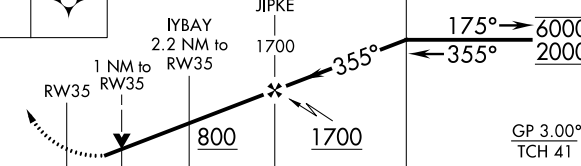2000	EPKAW	4 NM Holding Pattern			
					
					
CATEGORY	A	B	C	D	
LPV DA	320- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)				
LNAV/VNAV DA	385- $\frac{7}{8}$ 315 (400- $\frac{7}{8}$)				
LNAV MDA	440-1 370 (400-1)				