
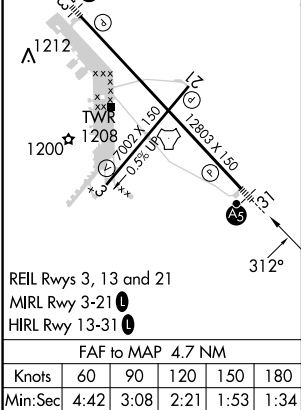


|               |         |          |       |
|---------------|---------|----------|-------|
| LOC/DME I-FOE | APP CRS | Rwy Idg  | 12803 |
| 110.1         | 312°    | TDZE     | 1037  |
| Chan 38       |         | Apt Elev | 1078  |

ILS or LOC RWY 31  
TOPEKA RGNL (F O E)

|                                                                                            |                                                                                                |                                                                                                               |                                                                                                                               |
|--------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| RADAR required for Cat E for procedure entry.                                              |                                                                                                | <div>MALSR</div> <div></div> | MISSED APPROACH: Climb to 1900 then climbing left turn to 3700 on heading 275° and on TOP VORTAC R-231 to DIETS INT and hold. |
| <div></div> | For inop ALS, increase S-ILS Cat E visibility to RVR 4000 and S-LOC Cat E visibility to 1¼ SM. |                                                                                                               |                                                                                                                               |
| <div></div> | *RVR 1800 authorized with use of FD or AP or HUD to DA.                                        |                                                                                                               |                                                                                                                               |

|                |                                   |                                       |                          |                  |
|----------------|-----------------------------------|---------------------------------------|--------------------------|------------------|
| ATIS<br>128.25 | KANSAS CITY CENTER<br>123.8 343.7 | FORBES TOWER*<br>120.8 (CTAF) 0 340.2 | GND CON<br>118.425 275.8 | UNICOM<br>122.95 |
|----------------|-----------------------------------|---------------------------------------|--------------------------|------------------|

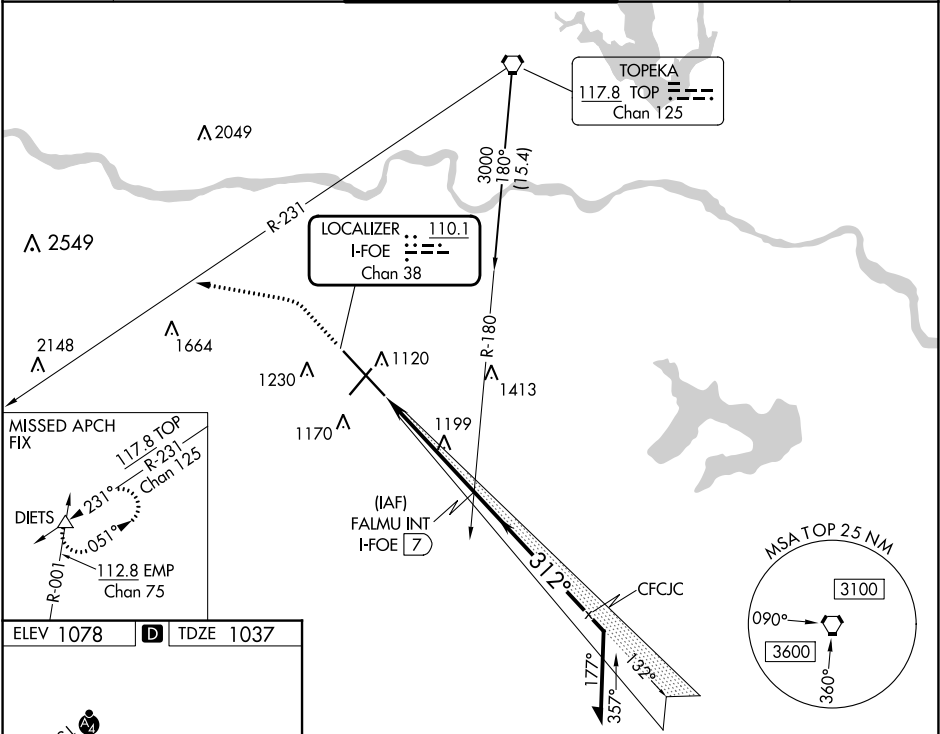

|                          |                       |                       |                         |                       |                         |
|--------------------------|-----------------------|-----------------------|-------------------------|-----------------------|-------------------------|
| 1900                     | 3700                  | TOP R-231             | DIETS                   | FALMU INT I-FOE (7)   | Remain within 10 NM     |
| ↑                        | hdg 275°              | △                     |                         |                       |                         |
| Cat E procedure turn NA. |                       |                       |                         |                       |                         |
| I-FOE (2.3)              |                       | I-FOE (3.4)           | 2600                    | 3000                  | GS 3.00° TCH 58         |
| 1.2 NM                   |                       | 3.6 NM                |                         |                       |                         |
| CATEGORY                 | A                     | B                     | C                       | D                     | E                       |
| S-ILS 31*                | 1237/24 200 (200-½)   |                       |                         |                       |                         |
| S-LOC 31                 | 1460/24               | 423 (400-½)           | 1460/40                 | 423 (400-¾)           |                         |
| CIRCLING                 | 1520-1<br>442 (500-1) | 1580-1<br>502 (600-1) | 1580-1½<br>502 (600-1½) | 1700-2<br>622 (700-2) | 1720-2¼<br>642 (700-2¼) |