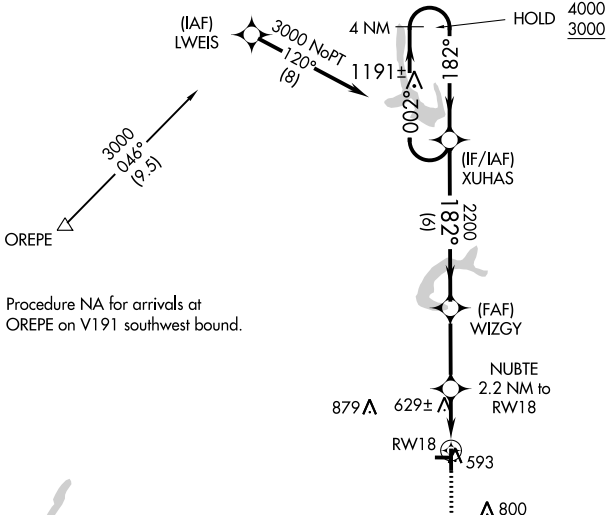


RNAV (GPS) RWY 18
GREENVILLE (GRE)

NA Circling NA to Rwy's 9 and 27. Baro-VNAV and VDP NA when using Salem altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
Procedure NA at night. When local altimeter setting not received, use Salem altimeter setting and increase LPV DA to 905 feet; increase LNAV/VNAV DA to 905 feet; increase all MDAs 60 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM.

MISSED APPROACH:
Climb to 2300 direct
HODAN and hold

UNICOM
123.05 (CTAF) 

Procedure NA for arrivals at OREPE on V191 southwest bound.

MISSED APCH FIX

HODAN


182°

002°

4 NM



Technical drawing of a vertical assembly. A horizontal dimension of 2822 X 250 is shown. A vertical dimension of 4002 X 75 is shown. A vertical dimension of 27 is shown. A vertical dimension of 8 l is shown. A vertical dimension of 36 is shown. A 182° angle is indicated. A star symbol is present.

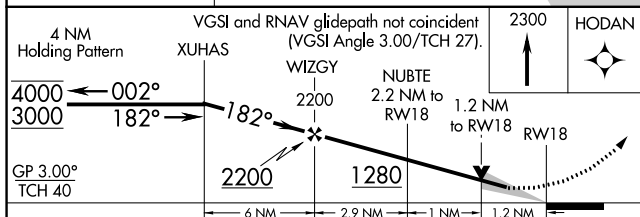

CATEGORY	A	B	C	D
LPV DA		848-1	307 (400-1)	
LNAV/VNAV DA		848-1	307 (400-1)	
LNAV MDA	940-1	399 (400-1)	940-1½	399 (400-1½)
C CIRCLING	980-1 439 (500-1)	1000-1 459 (500-1)	1220-2 679 (700-2)	1240-2¼ 699 (700-2¼)

REIL Rwy 18 and 36
MIRL Rwy 18-36 **L**