


VORTAC HBR	APP CRS	Rwy Idg	5507
111.8	354°	TDZE	1561
Chan 55		Apt Elev	1563

VOR RWY 35
HOBART RGNL (HBR)

⚠ When local altimeter setting not received, use Altus/Quartz Mountain Rgnl altimeter setting and increase all MDAs 80 feet, increase S-35 Cats C/D and Circling Cat C visibility ¼ SM, increase FAPRA fix minimums S-35 Cats C/D and Circling Cat C visibility ¼ SM. VDP NA when using Altus/Quartz Mountain Rgnl altimeter setting.

MISSED APPROACH: Climb to 2100, then climbing right turn to 3800 direct HBR VORTAC and hold.

ASOS 133.325	ALTUS APP CON ★ 125.1 353.7	UNICOM 122.8 (CTAF)
-----------------	--------------------------------	------------------------

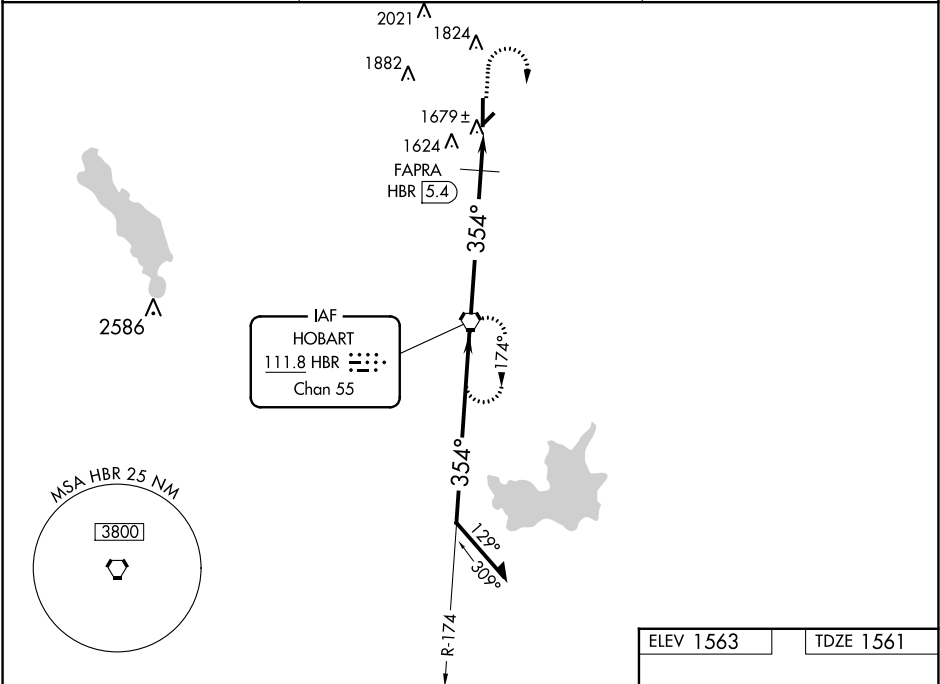

Remain within 10 NM

3800 174° 354° 3800

*2140 when using Altus/Quartz Mountain Rgnl altimeter setting.

HBR VORTAC

2.94° TCH 42

FAPRA HBR 5.4

HBR 6 HBR 7

5.4 NM 0.6 1 NM

CATEGORY	A	B	C	D
S-35	2060-1	499 (500-1)	2060-1¼ 499 (500-1¼)	2060-1½ 499 (500-1½)
CIRCLING	2060-1	497 (500-1)	2320-2¼ 757 (800-2¼)	2460-3 897 (900-3)
FAPRA FIX MINIMUMS				
S-35	1980-1	419 (500-1)	1980-1¼	419 (500-1¼)
CIRCLING	1980-1 417 (500-1)	2020-1 457 (500-1)	2320-2¼ 757 (800-2¼)	2460-3 897 (900-3)

ELEV 1563 TDZE 1561

354° 7 NM from FAF

MIRL Rwy 17-35

354° 7 NM from FAF

2975 X 60

0.4% UP

0.5% UP

354° 7 NM from FAF

Knots	60	90	120	150	180
Min:Sec	7:00	4:40	3:30	2:48	2:20