
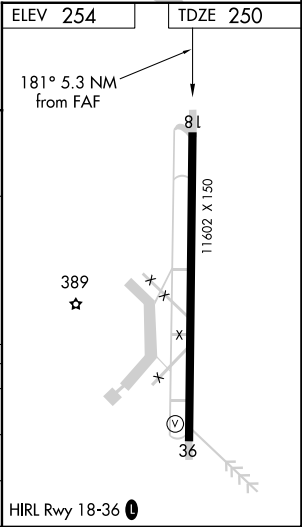
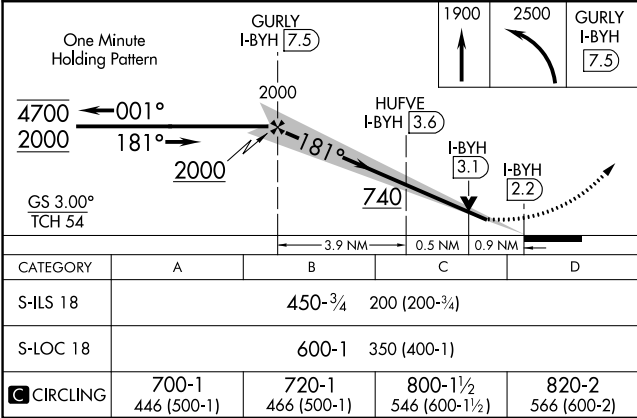


LOC/DME I-BYH	APP CRS	Rwy Idg
110.3	181°	11602
Chan 40		TDZE 250
		Apt Elev 254

ILS or LOC RWY 18
ARKANSAS INTL (BYH)

RADAR required for procedure entry. RNP APCH-GPS and DME required.	
▽ △NA Obtain local altimeter setting on CTAF, when not received, use Blytheville Muni altimeter setting and increase DA to 464 feet and all MDAs 20 feet. Circling NA east of Rwy 18-36.	MISSED APPROACH: Climb to 1900 then climbing left turn to 2500 direct GURLY and hold.
MEMPHIS CENTER 134.65 316.15	UNICOM 122.7 (CTAF) 0

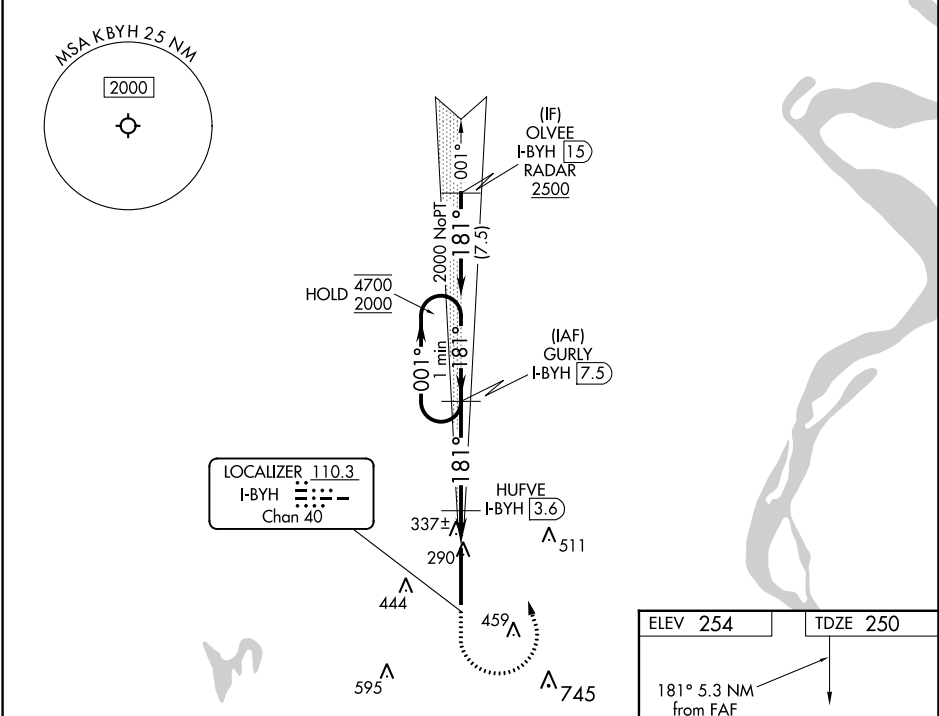



WAAS CH 58306 W18A	APP CRS 181°	Rwy ldg 11602 TDZE 250 Apt Elev 254
--	------------------------	--

RNAV (GPS) RWY 18
ARKANSAS INTL (BYH)

⚠ Inop table does not apply. Baro-VNAV NA when using Blytheville Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 18-36. DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Blytheville Muni altimeter setting and increase all DA 14 feet and all MDA 20 feet. Increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ½ mile.

MISSED APPROACH: Climb to 2500 direct HABSI and hold.

MEMPHIS CENTER 134.65 316.15	UNICOM 122.7 (CTAF) 0
--	---------------------------------

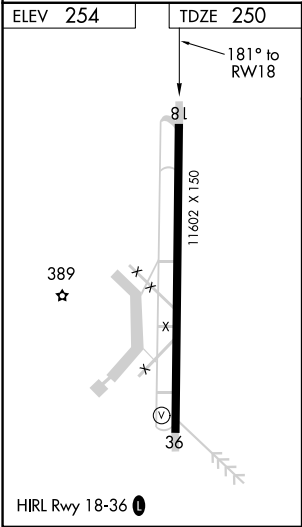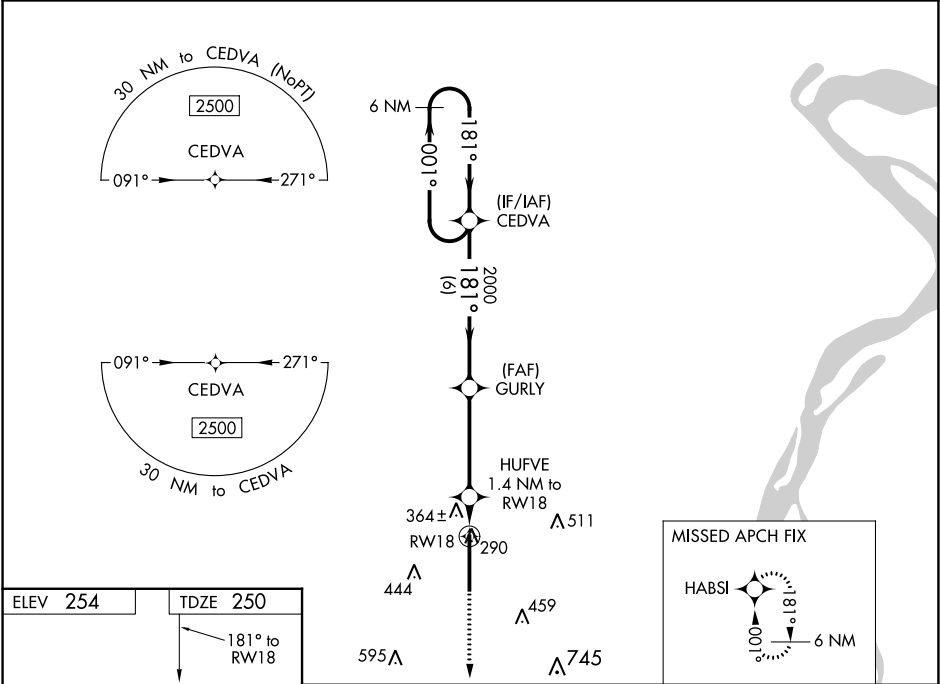

2500	HABSI	6 NM	CEDVA	Holding Pattern
*LNAV only.	HUFVE 1.4 NM to RW18	GURLY 2000	181°	001° → 2500
RW18	1.4 NM	3.9 NM	6 NM	GP 3.00° TCH 54
CATEGORY	A	B	C	D
LPV DA		450-3/4	200 (200-3/4)	
LNAV/VNAV DA		545-1	295 (300-1)	
LNAV MDA		620-1	370 (400-1)	
CIRCLING	700-1 446 (500-1)	720-1 466 (500-1)	800-1½ 546 (600-1½)	820-2 566 (600-2)

SC-1, 22 FEB 2024 to 21 MAR 2024

SC-1, 22 FEB 2024 to 21 MAR 2024

WAAS CH 78318 W36A	APP CRS 001°	Rwy ldg 11602 TDZE 254 Apt Elev 254
--	------------------------	--

RNAV (GPS) RWY 36

ARKANSAS INTL (BYH)


▼

⚠ NA

Inop table does not apply. Baro-VNAV NA when using Blytheville Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). Circling NA east of Rwy 18-36. DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Blytheville Muni altimeter setting and increase all DA 14 feet and all MDA 20 feet. Increase LNAV/VNAV all Cats and LNAV Cat C/D visibility 1⁄8 mile.

MISSED APPROACH: Climb to 2500 direct CEDVA and hold.

MEMPHIS CENTER 134.65 316.15	UNICOM 122.7 (CTAF) 0
--	---------------------------------

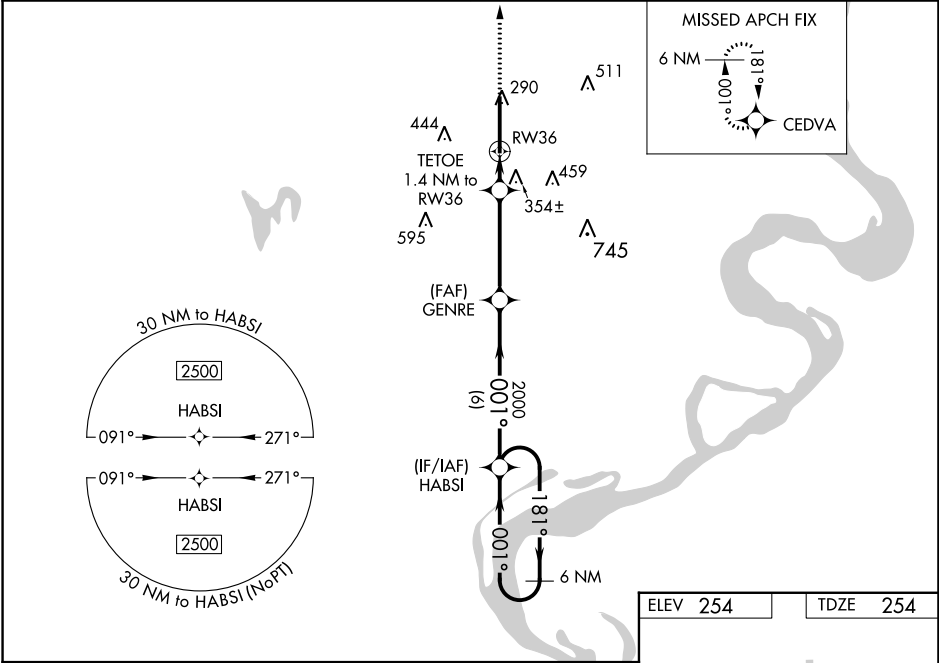

6 NM Holding Pattern

HABSI

2500 ← 181° 001° →

GP 3.00° TCH 51

2000

GENRE 2000

TETOE 1.4 NM to RW36

RW36

6 NM 3.9 NM 1.4 NM

2500 CEDVA

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		454-3⁄4	200 (200-3⁄4)	
LNAV/VNAV DA		537-1	283 (300-1)	
LNAV MDA		620-1	366 (400-1)	
CIRCLING	700-1 446 (500-1)	720-1 466 (500-1)	800-1½ 546 (600-1½)	820-2 566 (600-2)

ELEV 254 TDZE 254

389 ☆

81 11602 X 150

36

001° to RW36

HIRL Rwy 18-36 0

SC-1, 22 FEB 2024 to 21 MAR 2024

SC-1, 22 FEB 2024 to 21 MAR 2024