
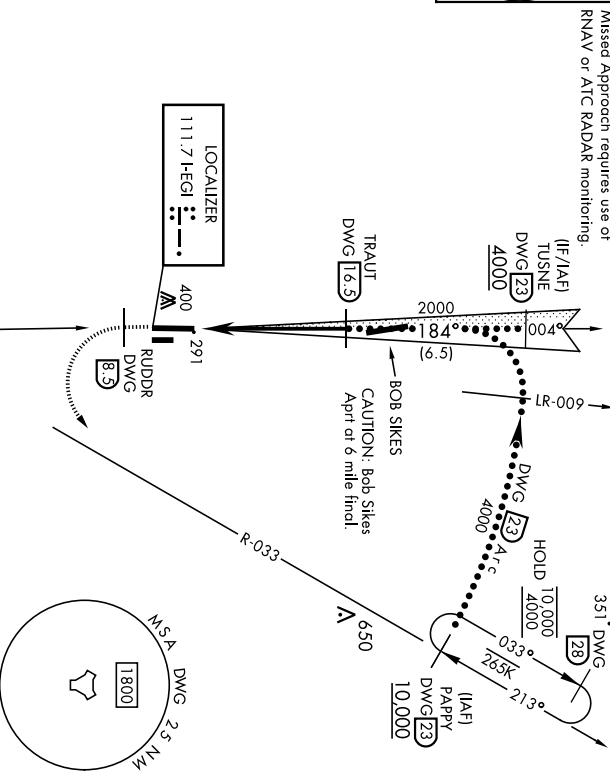


LOC I-EG1 111.7	APCH CRS 184°	Rwy Idg 8025
		TDZE 191
		Arprt Elev 195



DUKE FLD (EGLIN AF AUX NR3) (KEGI)

**** When ALS inop, increase RVR to 55, vis to 1 mile.**

GND CON
123.25 251.125



EMERG SAFE ALT 100 NM 3500

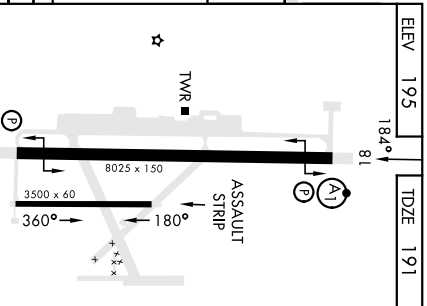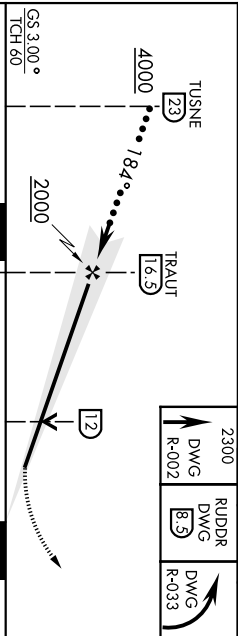

CATEGORY	C	D	E
S-ILTS 18 *	391/24	200 (200-1/2)	
S-SLOC 18 **	540/24	349 (400-3/8)	
G CIRCLING	700-1 1/2 505 (600-1 1/2)	760-2 565 (600-2)	780-2 585 (600-2)

HRL Rwy 18-36 36

FAF to MAP 5.5 NM

	Knots	120	140	160	180	200
Min:Sec	2:45	2:21	2:04	1:50	1:39	

VALPARAISO, FLORIDA

30°39'N-86°31'W

DUKE FLD (EGLIN AF AUX NR3) (KEGI)

Orig 23MAR23

HI-LS Y or LOC Y Rwy 18

HI-TACAN Y RWY 18

TACAN DWG	APCH CRS	Rwy Idg	8025
	TDZE		191
	Aprv Elev		195
TACAN Chon 2			183°

A-699 [USAF] DUKE FLD (EGLIN AF AUX NR3) (KEGI)






APPROACH: Climb on DWG R-003 to 9 DME (2300), then climbing left turn to 2300 direct DWG 23 DME (PAPPY) and hold.

ALIS ★	EGIN APP CON	TOWER ★	GND CON
244.575	125.1 281.45 132.1 360.6	133.2 290.425	123.25 251.125

PROCEDURE EFFECTIVE BY NOTAM


Missed Approach requires use of RNAV or ATC RADAR monitoring

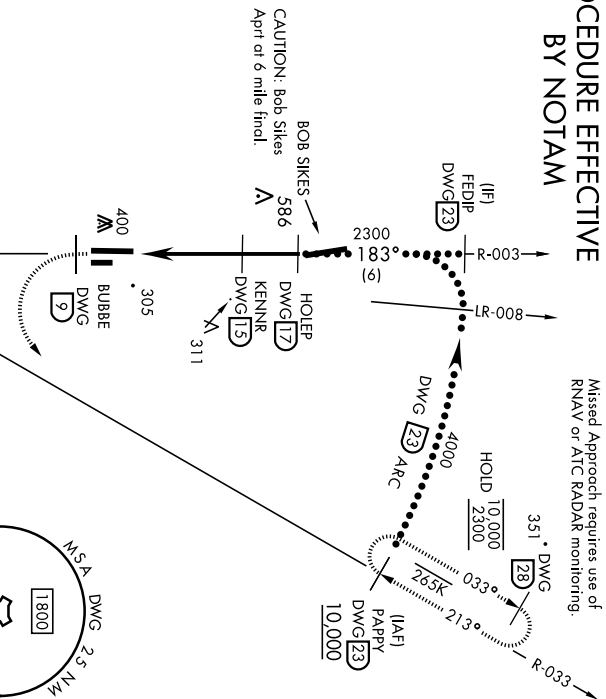

WARRINGTON
Chan 2 DWG

EMERG SAFE ALT 100 NM 3500

VGSI and descent angles not coincident (Angle 3.00/TCH 60).

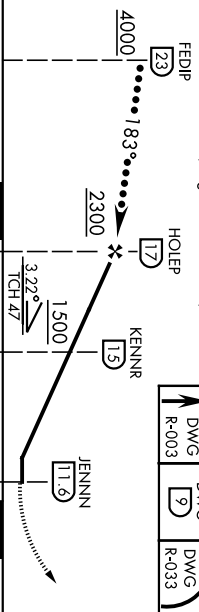


CATEGORY	C	D	E
S-18*	560/35	369	(400-5%)

 CIRCLING			
700-1½ 505 (600-1½)	760-2 565 (600-2)	780-2 585 (600-2)	

VALPARAISO, FLORIDA


30°39'N-86°31'W

DUKE FLD (EGLIN AF AUX NR3) (KEGI)

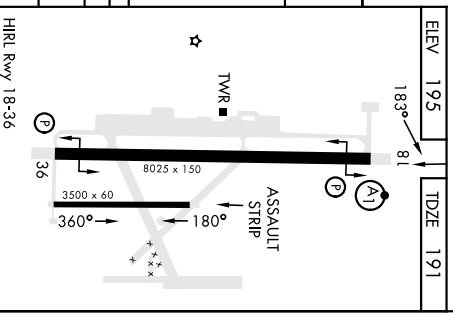

VALPARAISO, FLORIDA

ILS Z or LOC Z RWY 18

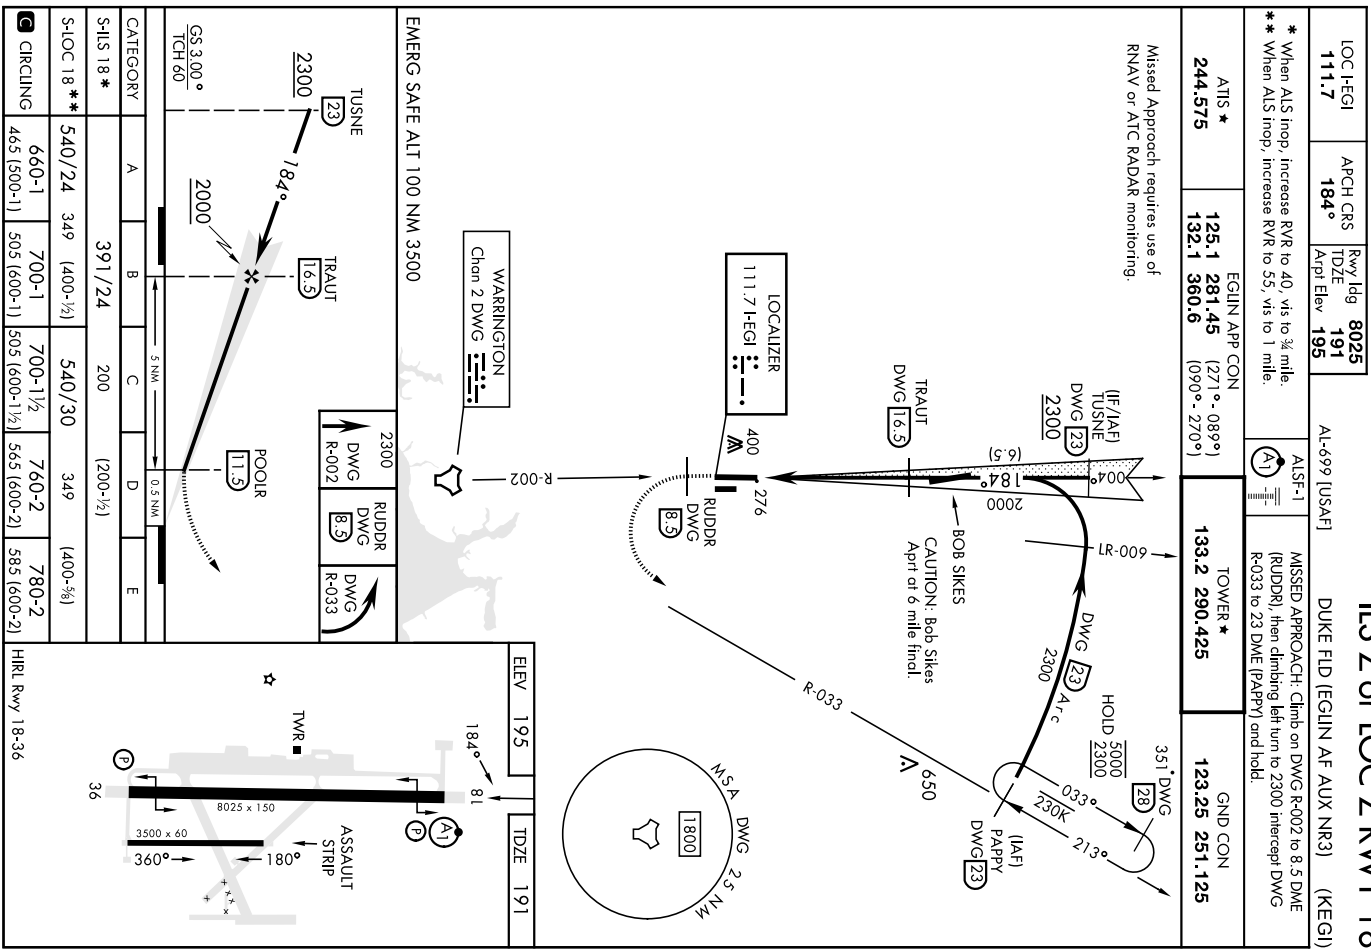

VALPARAISO, FLORIDA

RNAV (GPS) Z RWY 18

APCH CRS	Rwy Idg	8025
184°	TDZE	191
	Arprt Elev	195

AL-699 (USAF)

DUKE FIELD (EGLIN AF AUX NR 3) (KEGI)

RNP APCH	ALSIF-1	MISSED APPROACH: Climb to 3000 direct WUTAR and hold.
* When ALS inop, increase RVR to 40, vis to 3/4 mile. ** When ALS inop, increase RVR to 55, vis to 1 mile.		

ATIS★	APP CON	TOWER★	GND CON
244.575	125.1 281.45 271°-089° 132.1 360.6 090°-270°	133.2 290.425	123.25 251.125

*** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1 1/8 miles.


Circling Visibility Reduction by Helicopters NA.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.


When Local altimeter setting not received, use Bob Sikes altimeter setting.

With Bob Sikes altimeter setting:
Increase LNAV/VNAV DA by 21 and HAT by 21
LNAV not authorized.
When ALS inop, increase RVR to 45, vis to 7/8 miles.

EMERG SAFE ALT 100 NM 3500

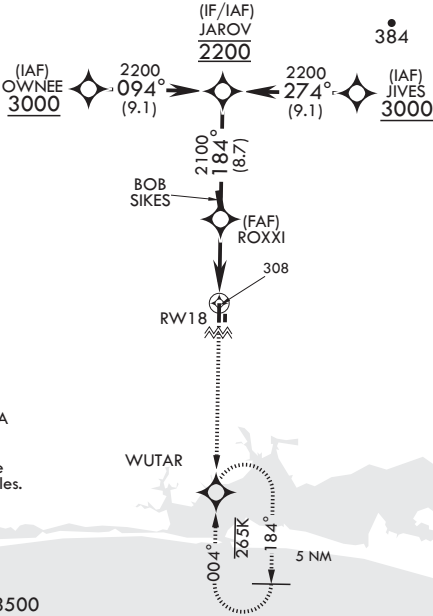

CATEGORY	A	B	C	D	E
LNAV/VNAV DA*	441/24		250	(300-1/2)	
LNAV MDA**	560/24	369 (400-1/2)	560/35	369	(400-3/4)
CIRCLING	660-1	700-1	700-1 1/2	760-2	780-2
	465 (500-1)	505 (600-1)	505 (600-1 1/2)	565 (600-2)	585 (600-2)
BOB SIKES ALTIMETER SETTING MINIMUMS					
LNAV MDA***	580/24	389 (400-1/2)	580/35	389	(400-3/4)
CIRCLING	680-1	740-1	740-1 1/2	760-2	800-2 1/4
	485 (500-1)	545 (600-1)	545 (600-1 1/2)	565 (600-2)	605 (700-2 1/4)

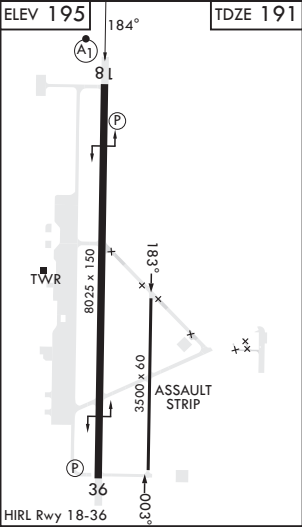

VALPARAISO, FLORIDA

30°39'N - 86°31'W

DUKE FIELD (EGLIN AF AUX NR 3) (KEGI)

Orig 23MAR23
TERPS

RNAV (GPS) Z RWY 18

SE-3, 22 FEB 2024 to 21 MAR 2024


SE-3, 22 FEB 2024 to 21 MAR 2024

APCH CRS	Rwy Idg	8025
004°	TDZE	191
	Arprt Elev	195


AL-699 (USAF)

DUKE FIELD (EGLIN AF AUX NR 3) (KEGI)


RNP APCH		MISSED APPROACH: Climb to 700, then climbing left turn to 2000 direct MUMMA and hold.	
Circling Visibility Reduction by Helicopters NA. When Local altimeter setting not received, use Bob Sikes altimeter setting.			
ATIS ★ 244.575	APP CON 125.1 281.45 271°-089° 132.1 360.6 090°-270°	TOWER ★ 133.2 290.425	GND CON 123.25 251.125

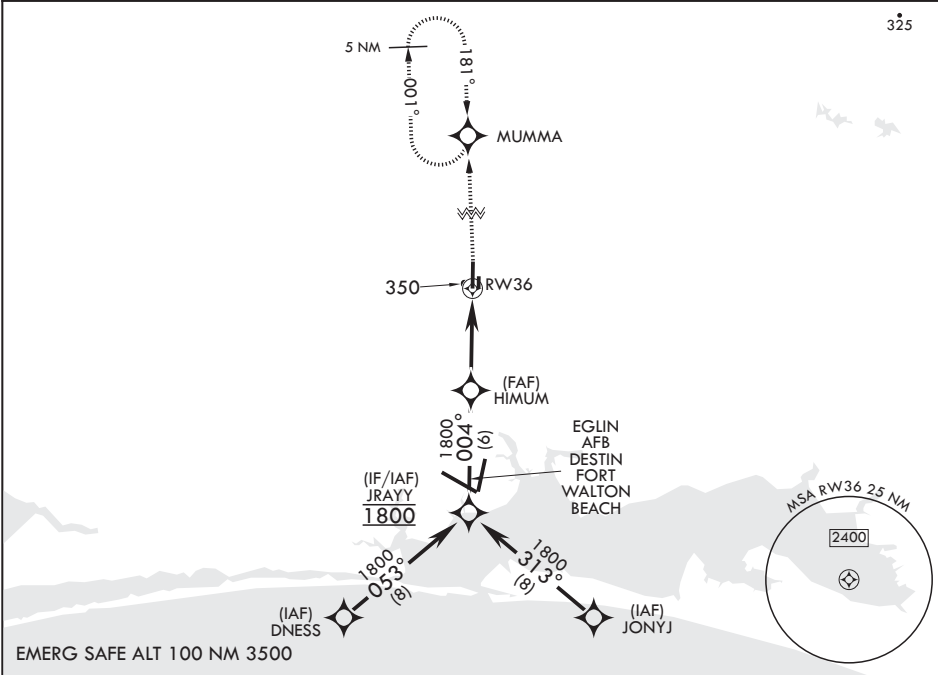

VDP NA with Bob Sikes Altimeter Setting.	700	2000	MUMMA	ELEV 195	TDZE 191
--	-----	------	-------	----------	----------

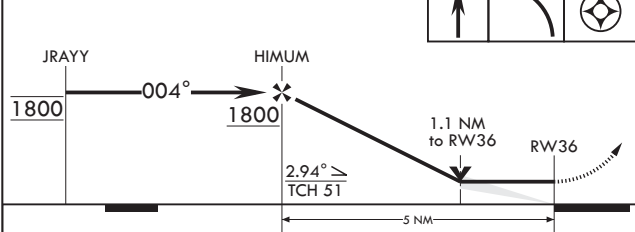

CATEGORY	A	B	C	D	E
LNAV MDA	600/55	409 (500-1)	600/60	409	(500-1½)
CIRCLING	660-1 465 (500-1)	700-1 505 (600-1)	700-1½ 505 (600-1½)	760-2 565 (600-2)	780-2 585 (600-2)
BOB SIKES ALTIMETER SETTING MINIMUMS					
LNAV MDA	640/55	449 (500-1)	640-1½	449	(500-1½)
CIRCLING	680-1 485 (500-1)	740-1 545 (600-1)	740-1½ 545 (600-1½)	760-2 565 (600-2)	800-2¼ 605 (700-2¼)

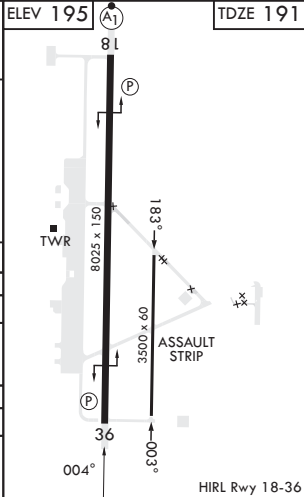

SE-3, 22 FEB 2024 to 21 MAR 2024

SE-3, 22 FEB 2024 to 21 MAR 2024

TACAN Z RWY 36

