

LOC I-SBD	APP CRS	Rwy ldg	10000
109.3	057°	TDZE	1103
		Apt Elev	1159

ILS or LOC Z RWY 6

SAN BERNARDINO INTL (SBD)

⚠


Circling NA northwest of Rwy 6-24. When local altimeter setting not received, use Ontario altimeter setting and increase DA to 1426 feet and all visibilities ½ SM; increase all MDA 80 feet and S-LOC Cats C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH:

Climb to 2000 then climbing right turn to 6000 direct PDZ VORTAC and hold, continue climb-in-hold to 6000.

* Missed approach requires minimum climb of 340 feet per NM to 4000; if unable to meet climb gradient, see LOC Y RWY 6.

ATIS	SOCAL APP CON	SAN BERNARDINO TOWER ★	GND CON	UNICOM
124.175	127.0 318.2	119.45 (CTAF) 0	121.8	122.975

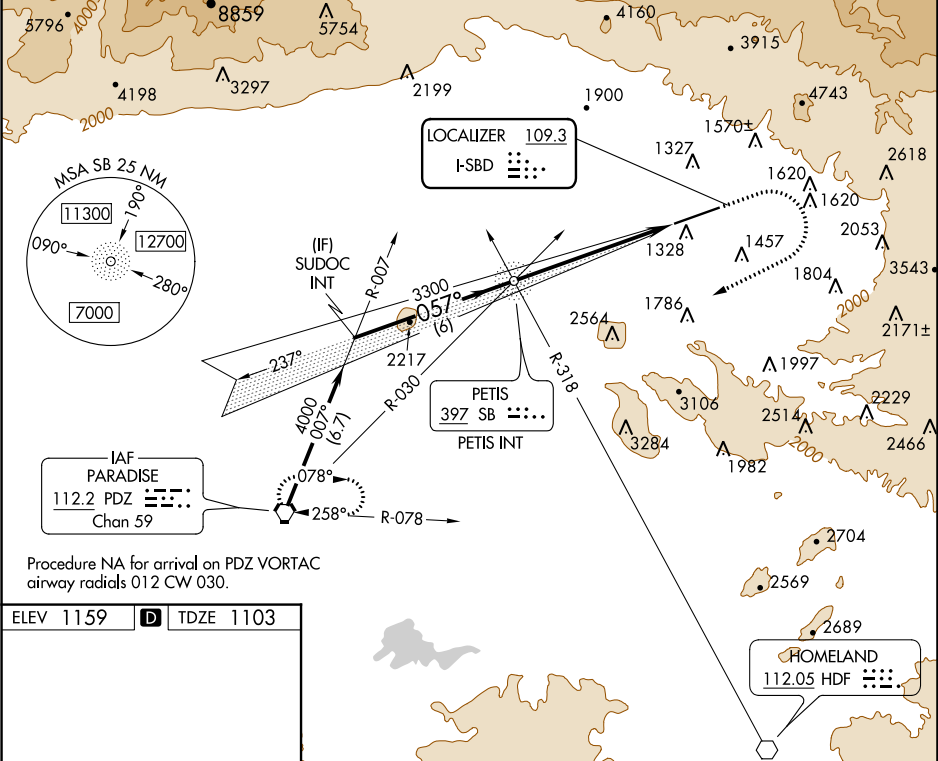

ELEV 1159

D

TDZE 1103

TWR

0.7% UP

0.8% DOWN

10000 X 200

057°

HIRL Rwy 6-24

REIL Rwy 6 and 24

FAF to MAP 6.1 NM

Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

GS 3.00° TCH 51	SUDOC INT		SB NDB PETIS INT		2000	6000	PDZ
	4000		3118		↑	↷	⬡
	057°		3300				
	6 NM		6.1 NM				
CATEGORY	A		B		C		D
S-ILS 6*			1353-¾		250 (200-¾)		
S-LOC 6*	1740-1		637 (600-1)		1740-1¾		637 (600-1¾)
CIRCLING	1740-1		581 (600-1)		1760-1¾		2640-3
					601 (700-1¾)		1481 (1500-3)


LOC I-SBD 109.3	APP CRS 057°	Rwy Idg TDZE 1103 Apt Elev 1159
---------------------------	------------------------	---

LOC Y RWY 6
SAN BERNARDINO INTL (SBD)

⚠ Circling NA northwest of Rwy 6-24. When local altimeter not received, use Ontario altimeter setting and increase all MDA 80 feet; increase S-LOC Cat B and Circling Cat B visibility ¼ SM.

MISSED APPROACH: Climb to 2700 then climbing right turn to 6000 direct PDZ VORTAC and hold, continue climb-in-hold to 6000.

ATIS 124.175	SOCAL APP CON 127.0 318.2	SAN BERNARDINO TOWER ★ 119.45 (CTAF) 0	GND CON 121.8	UNICOM 122.975
------------------------	-------------------------------------	--	-------------------------	--------------------------

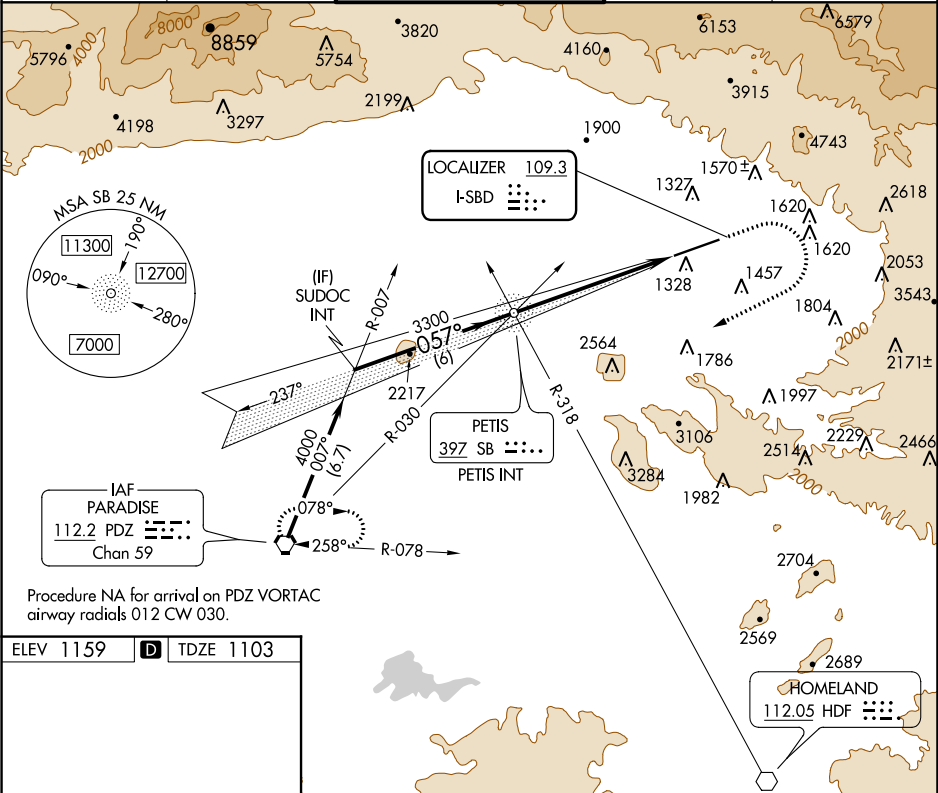

Procedure NA for arrival on PDZ VORTAC
airway radials 012 CW 030.

ELEV 1159	D	TDZE 1103
HIRL Rwy 6-24 0		
REIL Rwy 6 and 24 0		
FAF to MAP 6.1 NM		
Knots	60	90 120 150 180
Min:Sec	6:06	4:04 3:03 2:26 2:02



SUDOC INT		VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 52).		2700	6000	PDZ
4000		057°		3300	3.33°	TCH 52
6 NM		6.1 NM				
CATEGORY	A	B	C	D		
S-6	2020-1¼	917 (900-1¼)	2060-3	957 (1000-3)		
C CIRCLING	2020-1¼	861 (900-1¼)	2060-3	2640-3	901 (1000-3)	1481 (1500-3)

APP CRS	Rwy Idg	10000
057°	TDZE	1103
	Apt Elev	1159

RNAV (GPS) Y RWY 6
SAN BERNARDINO INTL (SBD)

RNP APCH	MISSED APPROACH: Climb to 2800 then climbing right turn to 6000 direct PDZ VORTAC and hold, continue climb-in-hold to 6000.
Circling NA northwest of Rwy 6-24. When local altimeter setting not received, use Ontario altimeter setting and increase all MDA 80 feet.	

ATIS 124.175	SOCAL APP CON 127.0 318.2	SAN BERNARDINO TOWER★ 119.45 (CTAF) 0	GND CON 121.8	UNICOM 122.975
-----------------	------------------------------	--	------------------	-------------------

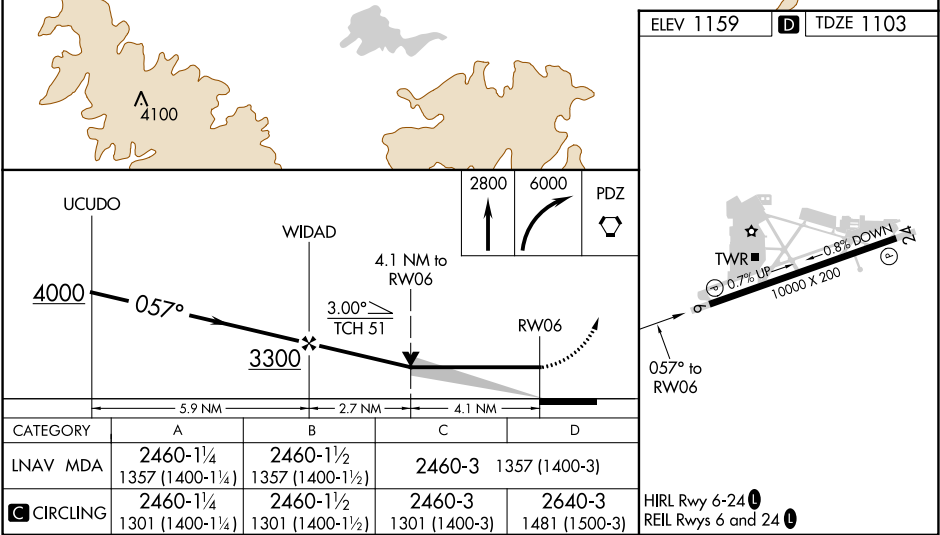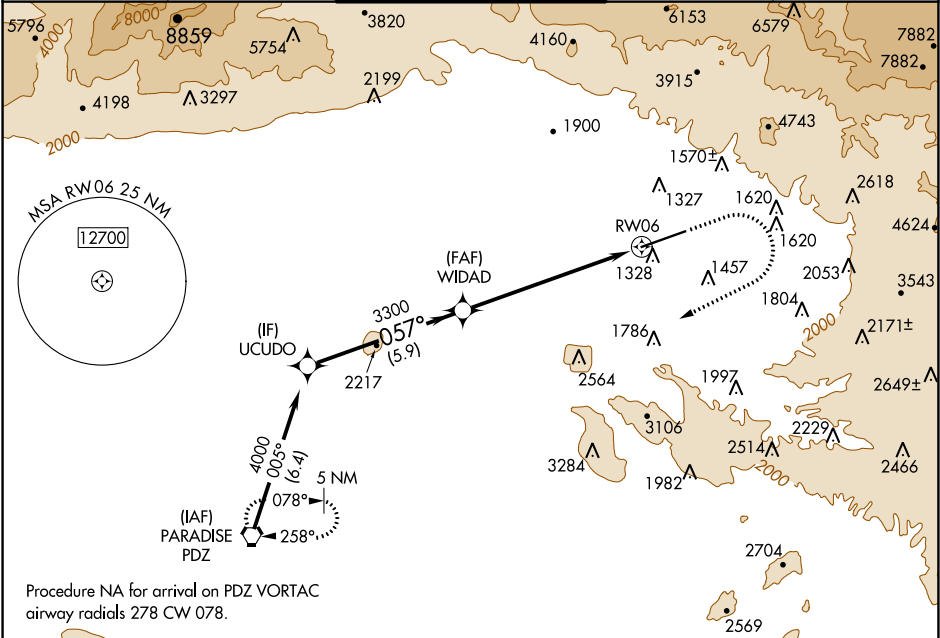

SW-3, 22 FEB 2024 to 21 MAR 2024

SW-3, 22 FEB 2024 to 21 MAR 2024

WAAS CH 66041 W06A	APP CRS 057°	Rwy Idg 10000 TDZE 1103 Apt Elev 1159
--	------------------------	--

RNAV (GPS) Z RWY 6
SAN BERNARDINO INTL (SBD)

RNP APCH


▼

⚠

Circling NA northwest of Rwy 6-24. When local altimeter setting not received, use Ontario altimeter setting and increase DA to 1426 feet and all visibilities ¼ SM; increase all MDA 80 feet and LNAV Cats C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 2000 then climbing right turn to 6000 direct PDZ VORTAC and hold, continue climb-in-hold to 6000.
Missed approach requires minimum climb of 340 feet per NM to 4000; if unable to meet climb gradient, see RNAV (GPS) Y RWY 6.

ATIS 124.175	SOCAL APP CON 127.0 318.2	SAN BERNARDINO TOWER ★ 119.45 (CTAF) 0	GND CON 121.8	UNICOM 122.975
------------------------	-------------------------------------	--	-------------------------	--------------------------

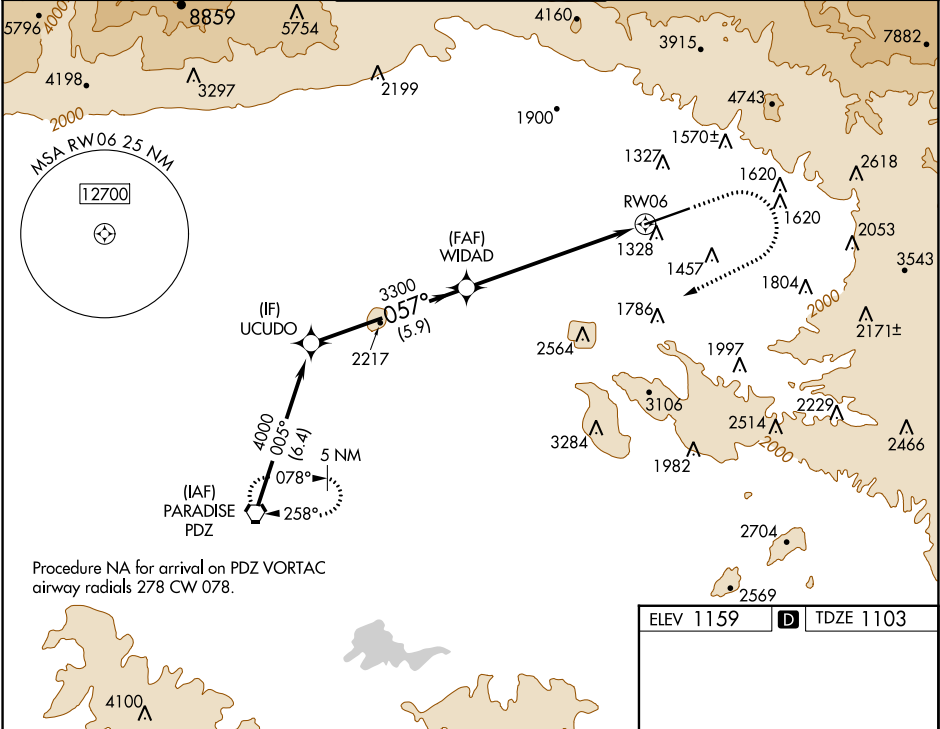

Procedure NA for arrival on PDZ VORTAC
airway radials 278 CW 078.

ELEV 1159	D	TDZE 1103
-----------	----------	-----------

UCUDO		WIDAD		2000	6000	PDZ
4000		3300		↑	↷	⬡
GP 3.00° TCH 51		3300		* 1.9 NM to RWY 06		
5.9 NM		4.9 NM		* LNAV only		
CATEGORY	A	B	C	D	RWY 06	
LPV DA#	1353-¾			250 (200-¾)		
LNAV MDA #	1740-1	637 (600-1)	1740-1¾	637 (600-1¾)		
CIRCLING	1740-1	581 (600-1)	1760-1¾	2640-3		
			601 (700-1¾)	1481 (1500-3)		

