


For inop ALS, increase S-LOC 15 Cats C and D visibility to 1½ mile.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR
AS

MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct LCH VORTAC and hold, continue climb-in-hold to 2000.

ATIS 118.75	LAKE CHARLES APP CON ★ 119.35 353.75	LAKE CHARLES TOWER ★ 120.7 (CTAF) 0 257.8	GND CON 121.8	CLNC DEL 126.25	UNICOM 122.95
----------------	---	--	------------------	--------------------	------------------

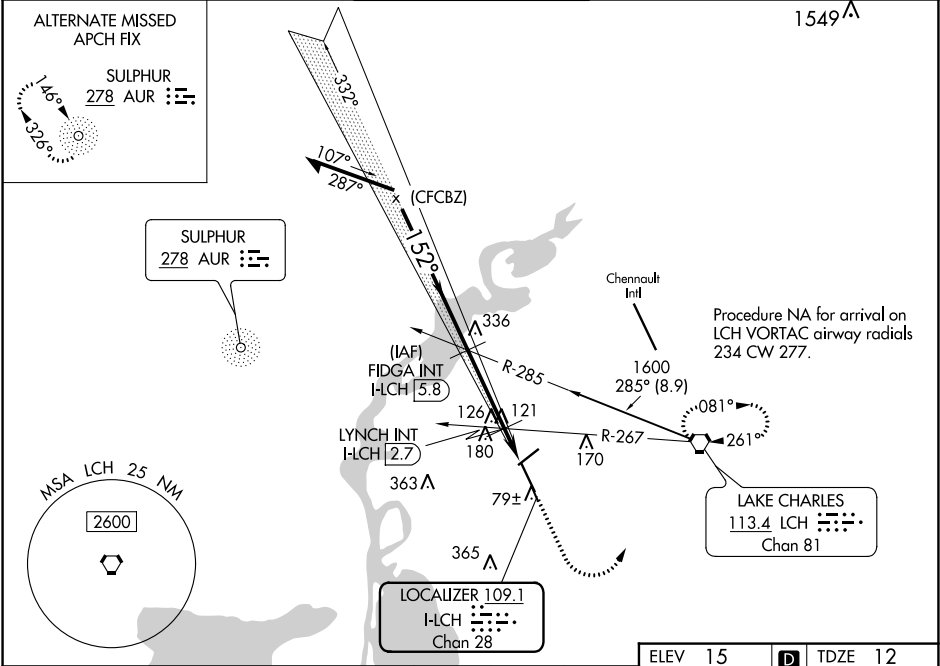

Remain within 10 NM

GS 3.00° TCH 55

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 70).

1000 2000 LCH

3.1 NM 1.4 NM

CATEGORY	A	B	C	D
S-ILS 15*	212/24 200 (200-½)			
S-LOC 15	500/24 488 (500-½)	500/50 488 (500-1)		
CIRCLING	500-1 485 (500-1)	580-1½ 565 (600-1½)	680-2 665 (700-2)	
LYNCH FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 15	440/24 428 (500-½)	440/40 428 (500-¾)		
CIRCLING	440-1 425 (500-1)	480-1 465 (500-1)	580-1½ 565 (600-1½)	680-2 665 (700-2)

ELEV 15 TDZE 12

REIL Rwy 5 and 23
MIRL Rwy 5-23
HIRL Rwy 15-33

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30