


ATIS ★ 134.925 269.9	RADAR required	Rwy	Knots	60	120	180	240	300	360
CLNC DEL 126.25 273.475		3L/R ★	V/V(fpm)	370	740	1110	1480	1850	2220
GND CON 133.175 335.8		21L/R †	V/V(fpm)	280	560	840	1120	1400	1680
TOWER ★ 119.1 379.9		★ 3L/R Minimum Climb Rate to 6000.							
DEP CON 118.15 363.125		† 21L/R Minimum Climb Rate to 5000.							

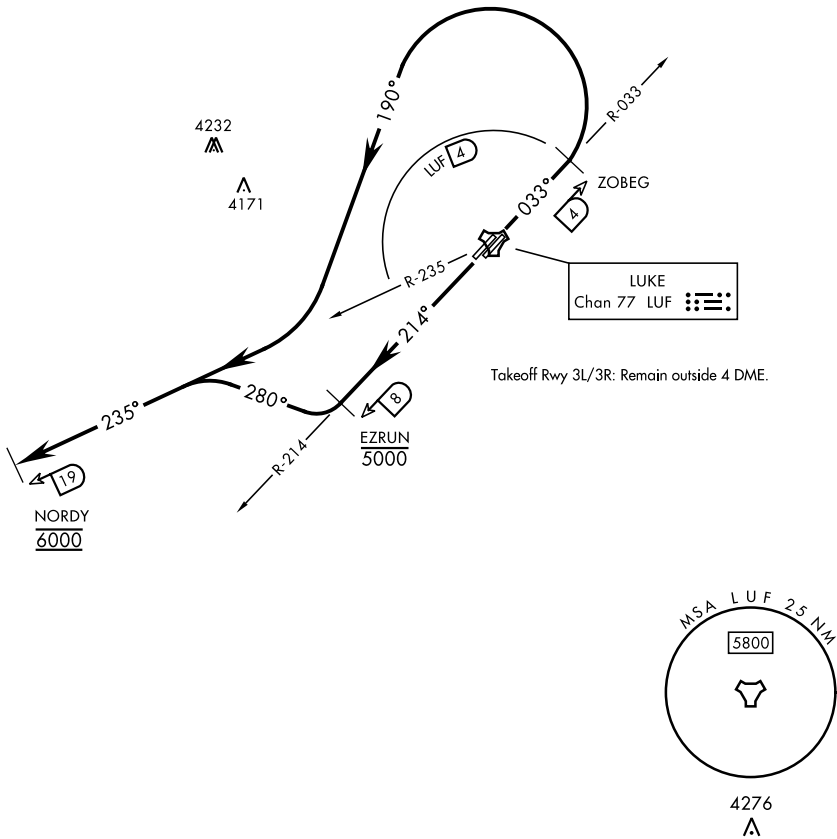

▼

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 3L/R: Climb on heading 033° to 6000. Abeam ZOBEG turn left heading 190° to intercept LUF TACAN R-235 and proceed outbound to NORDY. Remain outside LUF 4 DME. Maintain 6000 until NORDY or as assigned by ATC.

TAKEOFF RWY 21L/R: Climb on heading 214° to 5000. Abeam EZRUN turn right heading 280° to intercept LUF TACAN R-235 and proceed outbound to NORDY. Climb and maintain 6000 until NORDY or as assigned by ATC.

SW-4, 22 FEB 2024 to 21 MAR 2024

SW-4, 22 FEB 2024 to 21 MAR 2024