

|                                        |                        |                                                                |
|----------------------------------------|------------------------|----------------------------------------------------------------|
| WAAS<br>CH <b>78003</b><br><b>W35A</b> | APP CRS<br><b>353°</b> | Rwy Idg <b>11759</b><br>TDZE <b>177</b><br>Apt Elev <b>234</b> |
|----------------------------------------|------------------------|----------------------------------------------------------------|

## RNAV (GPS) RWY 35

PLATTSBURGH INTL (PBG)


**T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALS/R, increase LPV and LNAV/VNAV all Cats visibility to ¾ mile. For inop MALS/R when using Burlington altimeter setting, increase LPV and LNAV/VNAV all Cats visibility to 1 mile. When local altimeter setting not received, use Burlington altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility to ¾ mile, LNAV Cats C, D visibility to 1¼ mile, and increase Circling Cats C/D visibility ¼ mile. VDP and Baro-VNAV NA when using Burlington Intl altimeter setting.

MALSR




**MISSED APPROACH:**  
Climb to 3500 direct  
OTGOE and hold,  
continue climb-in-  
hold to 3500.

|                        |                                            |                           |                                 |
|------------------------|--------------------------------------------|---------------------------|---------------------------------|
| ASOS<br><b>132.225</b> | BURLINGTON APP CON ★<br><b>121.1 278.8</b> | CLNC DEL<br><b>121.85</b> | UNICOM<br><b>122.7 (CTAF) ①</b> |
|------------------------|--------------------------------------------|---------------------------|---------------------------------|

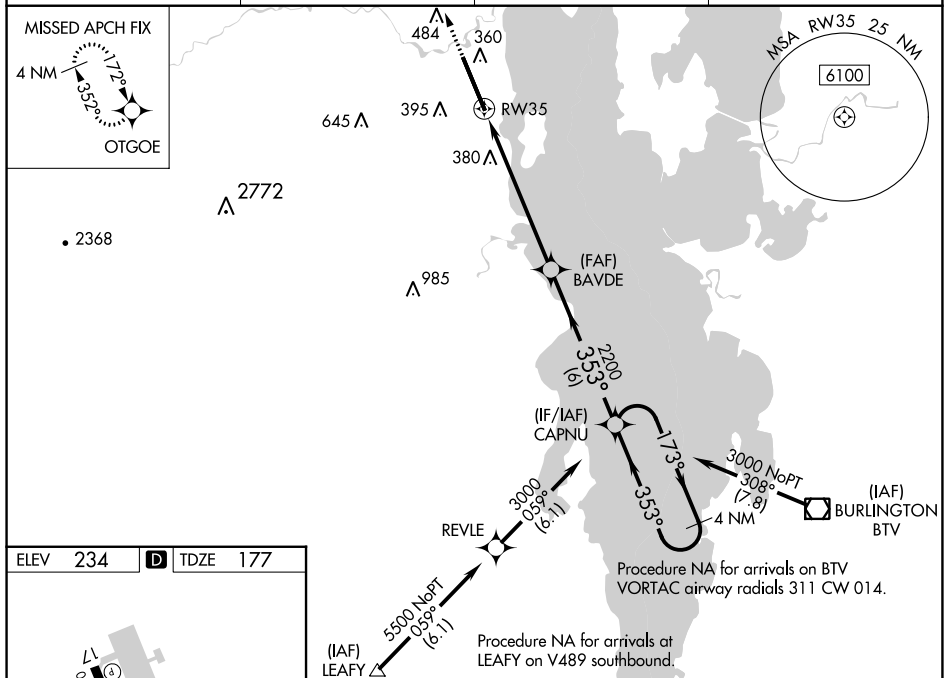

|      |     |          |      |     |
|------|-----|----------|------|-----|
| ELEV | 234 | <b>D</b> | TDZE | 177 |
|------|-----|----------|------|-----|

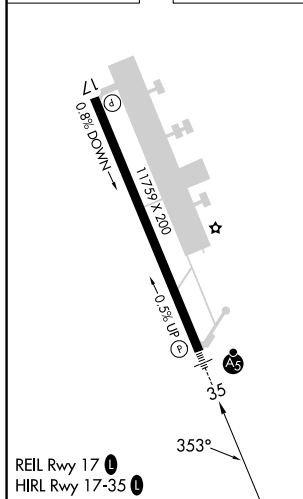

**\* LNAV only**

**\* 1.5 NM to RW35**

**RW35**

**BAYDE 2200**

**CAPNU**

**4 NM Holding Pattern**

**3500**

**3000**

**173°**

**353°**

**GP 3.00°**

**TCH 55**

| CATEGORY        | A                    | B                    | C                      | D                      |
|-----------------|----------------------|----------------------|------------------------|------------------------|
| LPV DA          |                      | 427-½                | 250 (200-½)            |                        |
| LNAV/VNAV DA    |                      | 434-½                | 257 (200-½)            |                        |
| LNAV MDA        | 700-½                | 523 (500-½)          | 700-1                  | 523 (500-1)            |
| <b>CIRCLING</b> | 720-1<br>486 (600-1) | 740-1<br>506 (600-1) | 800-1½<br>566 (700-1½) | 960-2¼<br>726 (800-2¼) |