


LOC I-PTK <u>111.1</u>	APP CRS 275°	Rwy Idg 6520 TDZE 974 Apt Elev 981
----------------------------------	------------------------	---

LOC BC RWY 27L
OAKLAND COUNTY INTL (PTK)

V
A Circling Rwy 9L, 36 NA at night. When local altimeter setting not received, use Coleman A Young Muni altimeter setting and increase all MDA 120 feet, increase S-27L Cat C/D visibility $\frac{3}{8}$ SM and Circling Cat C/D visibility $\frac{1}{2}$ SM.

MISSED APPROACH:
Climbing left turn to 3000 direct
SVM VORTAC and hold.

ATIS 125.025	DETROIT APP CON 132.35 284.0	PONTIAC TOWER★ 120.5 (CTAF) 0	GND CON 121,9	CLNC DEL 118,25	UNICOM 122.95
------------------------	--	---	-------------------------	---------------------------	-------------------------

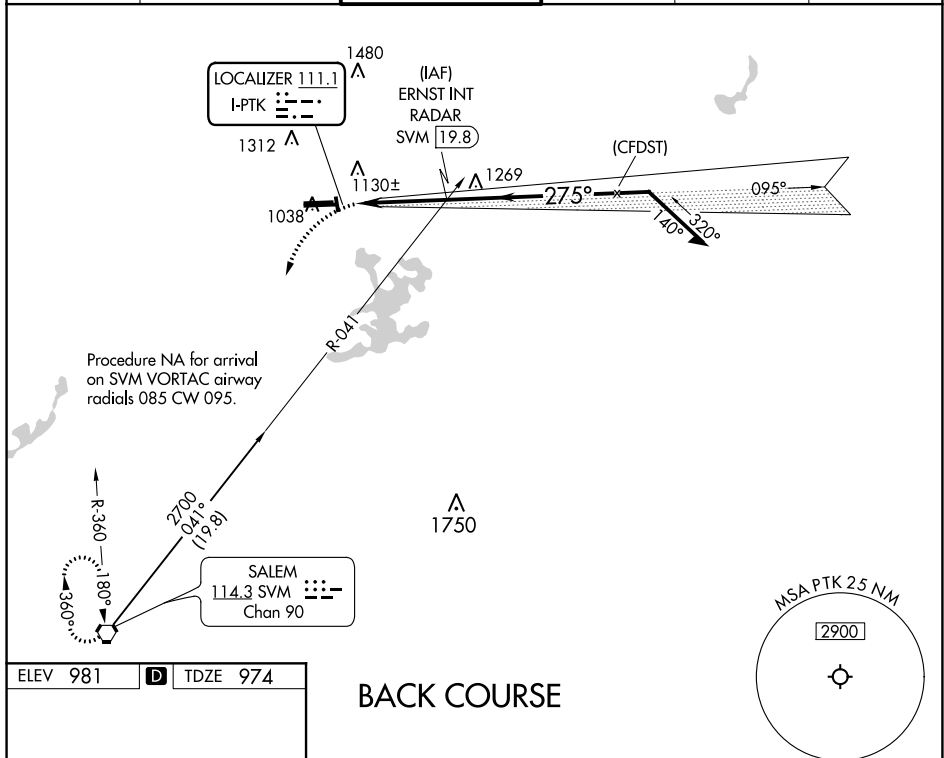

3000

SVM

ERNST INT RADAR

Remain within 10 NM

095°

2500

275°

2300

I-PTK

3.00°

TCH 42

Disregard GS indications.

0.7

3.3 NM