
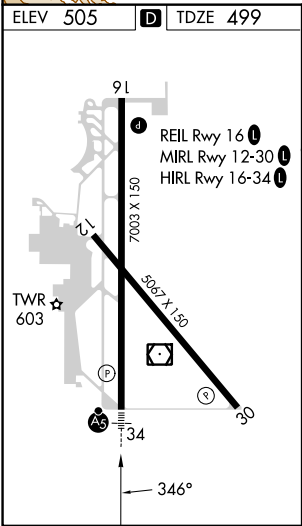


LOC/DME I-RDD	APP CRS	Rwy Idg	7003
108.7	346°	TDZE	499
Chan 24		Apt Elev	505

ILS or LOC RWY 34
REDDING RGNL (RDD)

DME required for LOC only.		MALSR
----------------------------	--	------------------------------

ATIS 124.1	OAKLAND CENTER 132.2 350.3	REDDING TOWER ★ 119.8(CTAF) 0 269.25	GND CON 121.7	UNICOM 122.95
----------------------	--------------------------------------	--	-------------------------	-------------------------

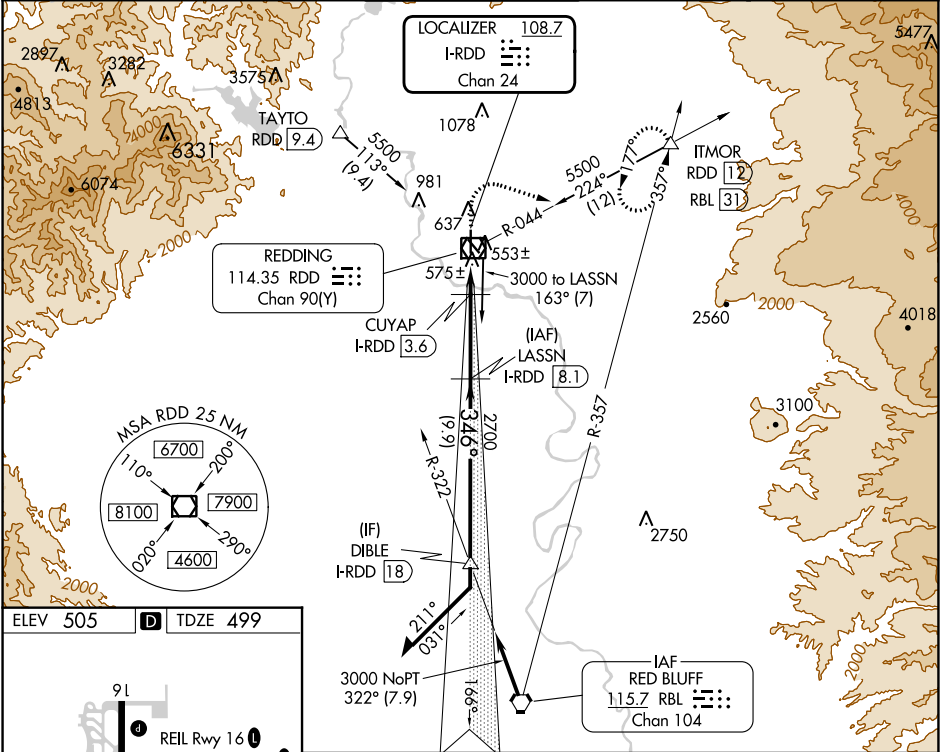

1700 ↑ hdg 090°	5000	RDD R-044	ITMOR △	LASSN I-RDD 8.1	VGS1 and ILS glidepath not coincident (VGS1 Angle 3.00/TCH 55).				
Use I-RDD DME when on the localizer course. * LOC only.				2700	166°	DIBLE I-RDD 18	3000	3000	Remain within 1.5 NM
CUYAP I-RDD 3.6				2700	346°	3000	GS 3.00° TCH 52		
I-RDD 1.3				2.3 NM	4.5 NM	9.9 NM			
CATEGORY	A		B		C		D		E
S-ILS 34					699-½		200 (200-½)		
S-LOC 34	840-½		341 (400-½)		840-⅝		341 (400-⅝)		
CIRCLING	940-1		1000-1		1120-1¾		1340-2¾		1340-3
	435 (500-1)		495 (500-1)		615 (700-1¾)		835 (900-2¾)		835 (900-3)