

LOC/DME I-SLV	APP CRS	Rwy Idg	12R	12L
110.9	126°	TDZE	8587	8831
Chan 46		Apt Elev	46	44
			62	62

ILS or LOC RWY 12R


NORMAN Y MINETA SAN JOSE INTL (SJC)

DME required.
For inoperative MALS, increase S-LOC 12R
Cat C/D visibility to 1 mile.


MALSR
Rwy 12R

MISSED APPROACH: Climb to 500 then climb to 4000
on SJC VOR/DME R-121 to GILRO/SJC 26.7 DME
and hold.

D-ATIS	NORCAL APP CON	SAN JOSE TOWER ★	GND CON	CLNC DEL	CPDLC	UNICOM
126.95	120.1 290.25	124.0 (CTAF) 0 257.6	121.7	118.0		122.95

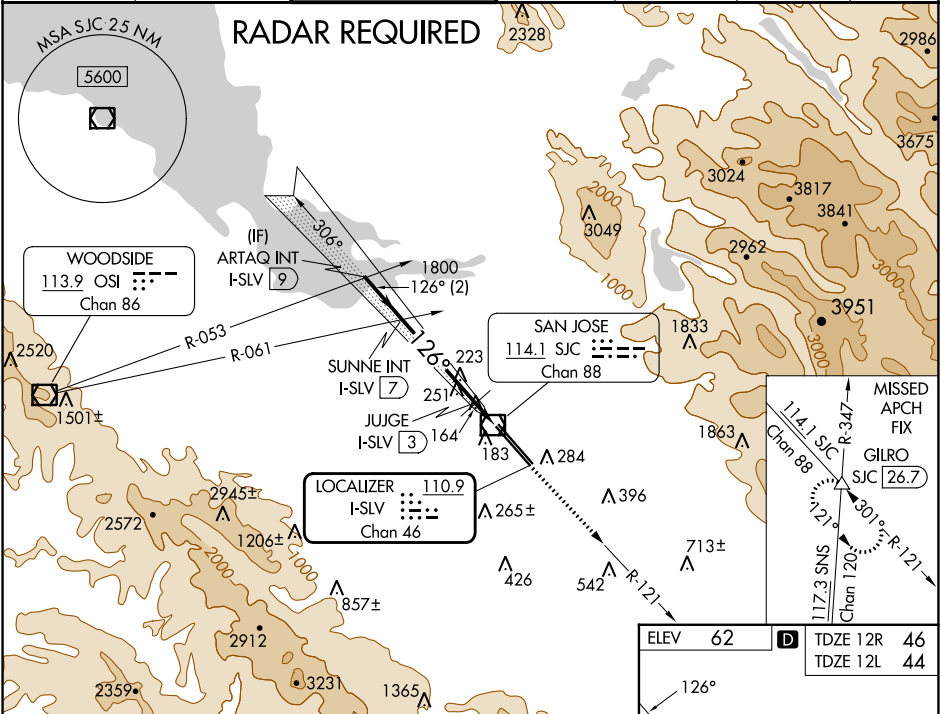

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 75).				
ARTAQ INT I-SLV 9 SUNNE INT I-SLV 7				
1800 — 126° — 1800				
GS 3.00° TCH 58				
2 NM 4 NM 1.4 NM				
CATEGORY	A	B	C	D
S-ILS 12R	251-½		205 (200-½)	
S-LOC 12R	420-½		374 (400-½)	
SIDESTEP RWY 12L	600-1		556 (600-1)	
			600-1½	
			556 (600-1½)	
			600-2	
			556 (600-2)	

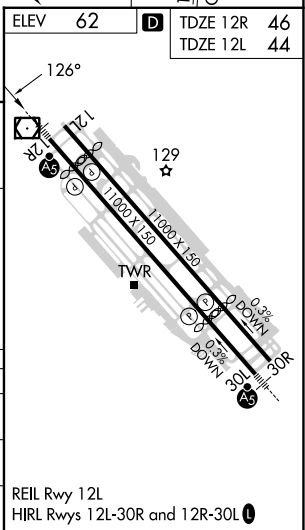

SW-2, 22 FEB 2024 to 21 MAR 2024

SW-2, 22 FEB 2024 to 21 MAR 2024