

HI-ILS or LOC/DME Z RWY 16


LOC I-SKF 110.1	APCH CRS 158°	Rwy Idg 11,550 TDZE 690 Arpt Elev 690	AL-371 [USAF]	KELLY FLD (KSKF)
---------------------------	-------------------------	--	---------------	------------------

T *When ALS inop, increase RVR to 40 and vis to $\frac{3}{4}$ mile.
 **When ALS inop, increase RVR to 60 and vis to $1\frac{1}{8}$ miles.
 ***Circling not authorized E of Rwy 16-34.




MISSED APPROACH: Climb to 2500 via KSY R-163 until 4 DME, then continue climb to 3000 to FITER/15 DME and hold.

ATIS	SAN ANTONIO APP CON	KELLY TOWER	GND CON
120.45 273.5	118.05 353.5	124.3 322.35	121.8 289.4

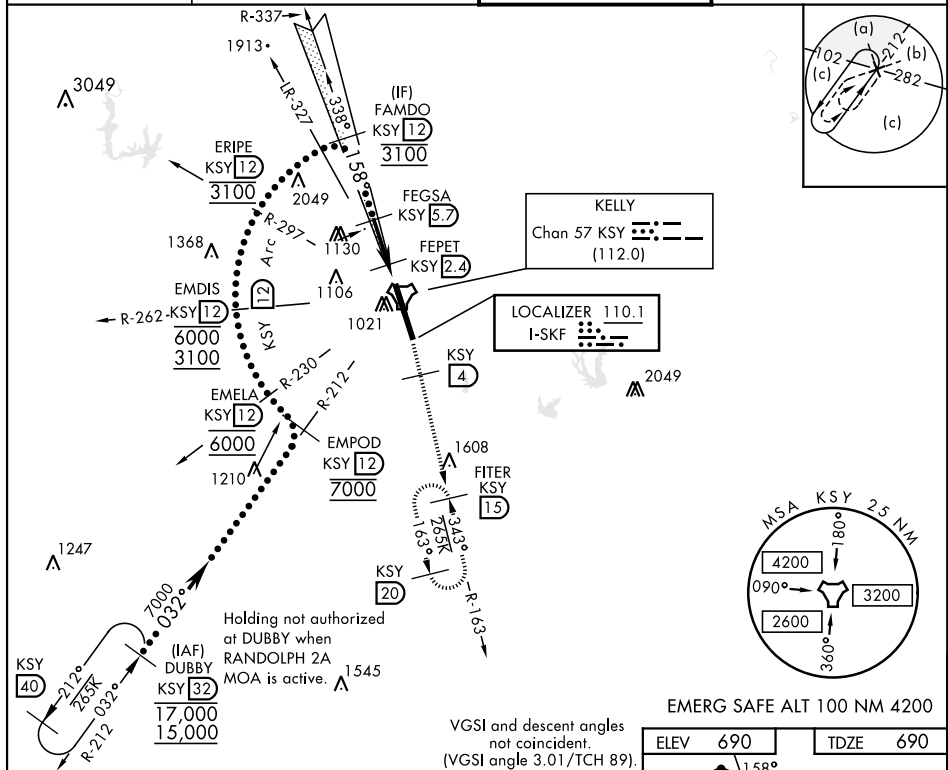

CATEGORY	C	D	E
S-ILS 16 *	890/24	200	(200-½)
S-LOC/ ** DME 16	1080/35	390	(400-⅝)
C CIRCLING	1340-1¼ 650 (700-1¼)	1400-2¼ 710 (800-2¼)	1900-3 1210 (1300-3)

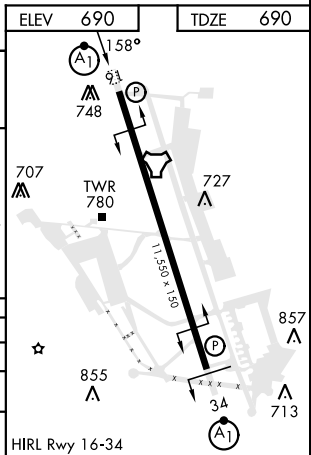

HI-ILS or LOC/DME Z RWY 16