

LOC I-BZQ	APP CRS	Rwy Idg	5701
111.5	320°	TDZE	179
		Apt Elev	187

ILS or LOC RWY 32
STATESBORO-BULLOCH COUNTY (TBR)

ADF required.


⚠

Circling to Rwy 6/24 NA at night. When local altimeter setting not received, use Sylvania altimeter setting and increase S-ILS 32 DA to 408 feet; increase all MDAs 40 feet; and Circling visibility Cat C ¼ SM. For inop ALS, increase S-LOC 32 Cat C and D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1300 then climbing right turn to 2000 direct BZ NDB and hold.

AWOS-3 119.025	SAVANNAH APP CON ★ 118.4 354.0	UNICOM 122.725 (CTAF) 0
-------------------	-----------------------------------	----------------------------

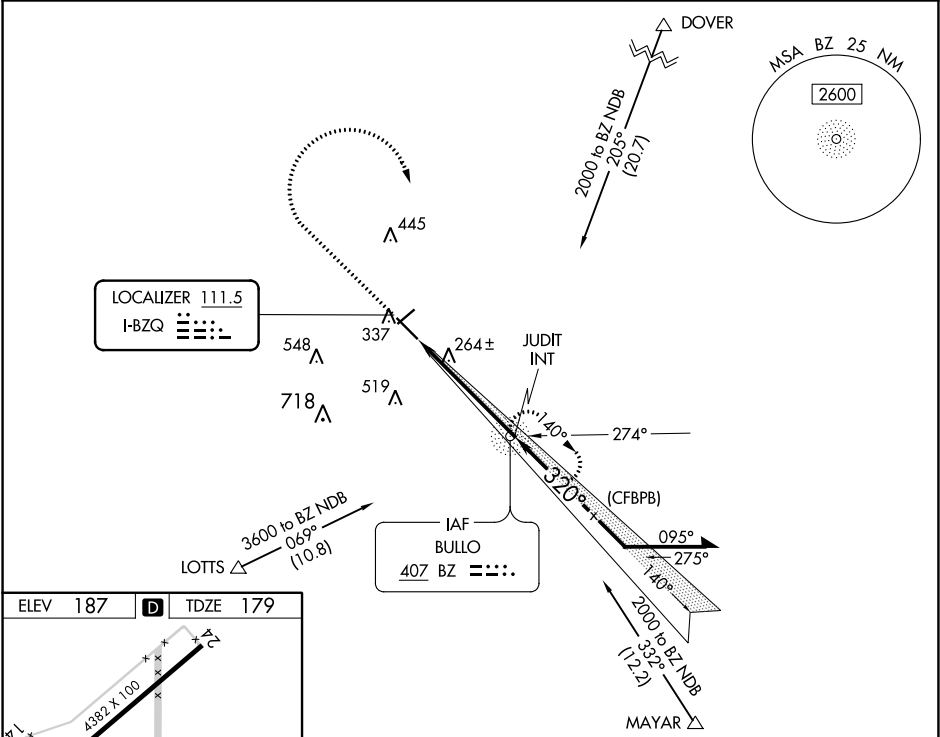

ELEV 187 TDZE 179

1300 2000 BZ

BZ NDB

140° 2000 320° 1800

JUDIT INT 1800

GS 3.00° TCH 49

CATEGORY	A	B	C	D
S-ILS 32	379-½ 200 (200-½)			
S-LOC 32	520-½ 341 (400-½)	520-5/8 341 (400-5/8)		
CIRCLING	640-1 453 (500-1)	740-1 553 (600-1)	840-1 653 (700-1 ¾)	860-2 ¼ 673 (700-2 ¼)

SE-4, 22 FEB 2024 to 21 MAR 2024

SE-4, 22 FEB 2024 to 21 MAR 2024


RNAV (GPS) RWY 32
STATESBORO-BULLOCH COUNTY (TBR)

▲ Circling to Rwy 6/24 ICA at night. Baro-VNAV ICA when using Sylvania altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.
For inop ALS. Increase LNAV/VNAV all Cats visibility to ½ SM and LNAV C/D to 1½ SM.
When local altimeter setting not received. Use Sylvania altimeter setting and increase LPV DA to 408 feet; increase LNAV/VNAV DA to 490 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat C ¼ SM. For inop ALS when using Sylvania altimeter setting, increase LNAV/VNAV all Cats visibility to ½ SM and LNAV C/D to 1½ SM.


MALSI

MISSED APPROACH:
Climb to 2600 direct
EPEDE and hold.

UNICOM
122.725 (CTAF) **L**

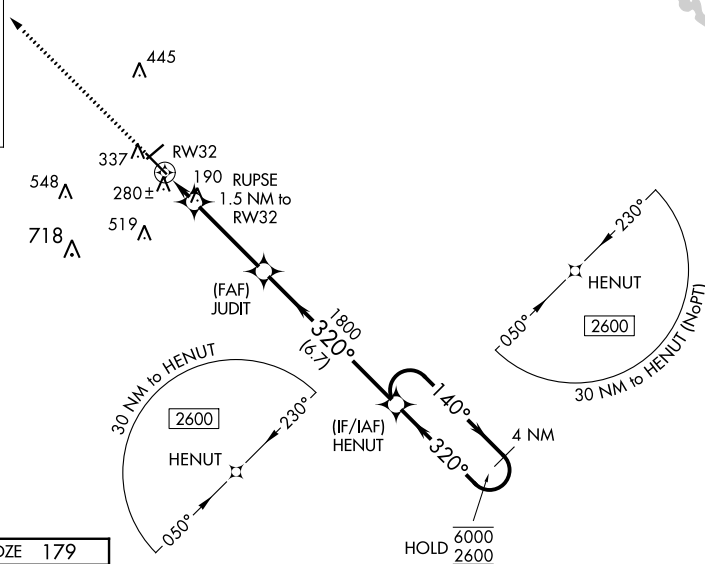

2600	EPEDE
	

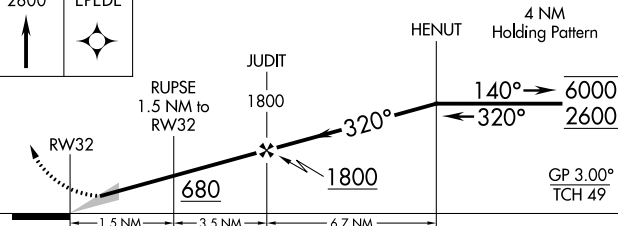

CATEGORY		A	B	C	D
LPV	DA	379-1/2		200 (200-1/2)	
LNAV/ VNAV	DA	461-1/2		282 (300-1/2)	
LNAV	MDA	540-1/2 361 (400-1/2)		540-5/8 361 (400-5/8)	
 CIRCLING		640-1 453 (500-1)	740-1 553 (600-1)	840-13/4 653 (700-13/4)	860-21/4 673 (700-21/4)