

21336

LEWIS THREE DEPARTURE (GRAY3 • GRAY)

GRAY AAF (JOINT BASE LEWIS MCCORD) (KGRF)
FORT LEWIS, WASHINGTON

ATIS 124.65 306.2
CLNC DEL
121.9 290.2
GND CON
121.9 290.2
GRAY TOWER *
119.325 (CTAF) 256.8
SEATTLE DEP CON
120.1 290.9


Rwy	Knots	60	120	180	240	300	360
*33 (A)	V/V(ft/min)	469	938	1407	1876	2345	2814
+15 (B)	V/V(ft/min)	400	800	1200	1600	2000	2400

AL-413 [USA]

* Minimum
 (A) to 600 feet for civil use)
 (B) to 700

† ATC Climb Rate

SEATTLE
 116.8 SEA
 Chan 115

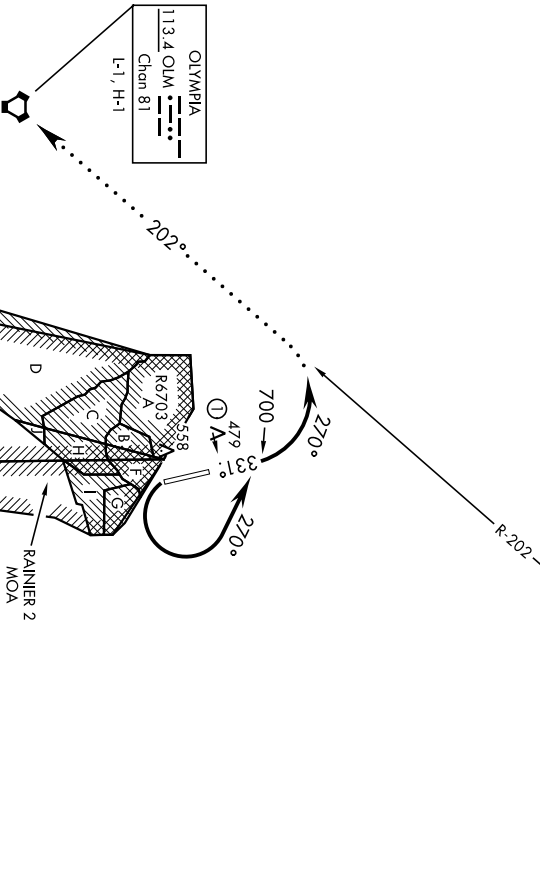

RADAR REQUIRED

DEPARTURE ROUTE DESCRIPTION

(A) 3003' from Rwy 33

TAKE-OFF Rwy 15: Turn left as soon as practical (departing 2700), thence

TAKE-OFF Rwy 33: Climb heading 331° to 700, thence

Turn left (unless otherwise directed by ATC) heading 270° for RADAR vectors to assigned route. Maintain altitude as assigned by ATC. Expect filed altitude within 5 min after departure.

LOST COMMUNICATIONS: If no transmissions are received within three minutes after departure, continue climb to assigned altitude, intercept and proceed via SEA VORTAC R-202 to the OLM VORTAC, then via assigned route.

LEWIS THREE DEPARTURE (GRAY3 • GRAY)

FORT LEWIS, WASHINGTON
GRAY AAF (JOINT BASE LEWIS MCCORD) (KGRF)