


WAAS CH 86217 W01A	APP CRS 010°	Rwy Idg 6500 TDZE 1101 Apt Elev 1109
---------------------------------	------------------------	---

RNAV (GPS) RWY 1

RICE LAKE RGNL/CARL'S FLD (RPD)

	If local altimeter setting not received, use Chippewa Valley Rgnl altimeter setting and increase all DAs/MDAs 120 feet. DME/DME RNP-0.3 NA. Baro-VNAV NA below -17°C (3°F). Baro VNAV and VDP NA when using Chippewa Valley Rgnl altimeter setting. For inoperative MALSR, increase LPV visibility to 1, and LNAV Cat D visibility to 1¼. Circling Rwy 13, 31 NA at night.		MISSED APPROACH: Climb to 3200 direct ORBEW and hold.
--	---	--	---

AWOS-3 120.525	MINNEAPOLIS CENTER 125.3 335.6	UNICOM 122.7(CTAF)0
--------------------------	--	-------------------------------

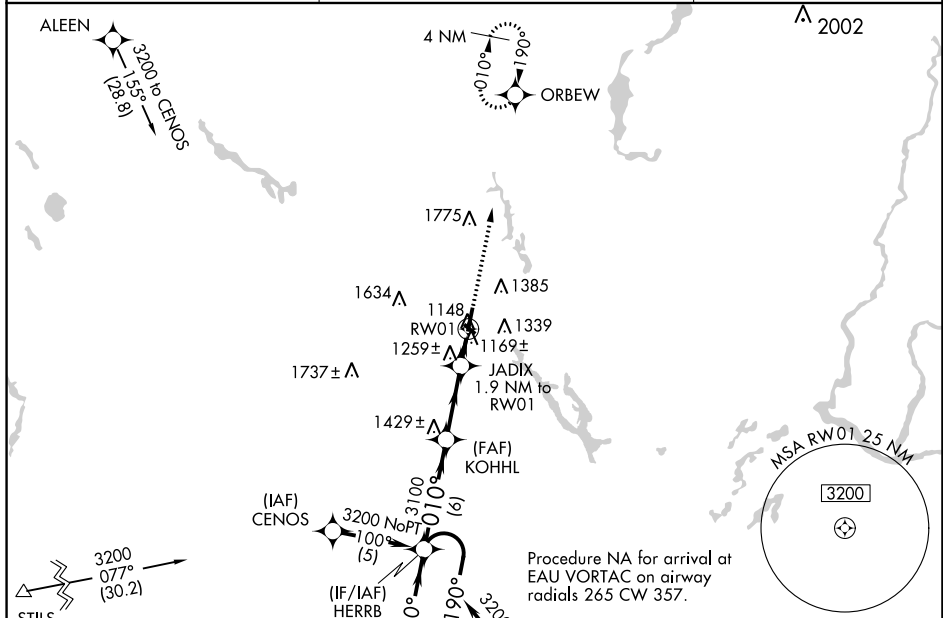

4 NM Holding Pattern

3200

←190°
010°→

GP 3.00°
TCH 45°

HERRB

KOHL

JADIX
1.9 NM to RW01
* LNAV only
1.3 NM to RW01

3200 ORBEW

3100

1760

6 NM

4.2 NM

0.6

1.3

CATEGORY	A	B	C	D
LPV DA		1390-1/2	289 (300-1/2)	
LNAV/VNAV DA		1440-3/4	339 (400-3/4)	
LNAV MDA	1520-1/2	419 (500-1/2)	1520-3/4 419 (500-3/4)	1520-1 419 (500-1)
CIRCLING	1600-1 1/4 493 (500-1 1/4)	1740-1 1/4 631 (700-1 1/4)	1740-1 3/4 631 (700-1 1/4)	1940-2 3/4 831 (900-2 3/4)

010°